SATIN TAPE MACHINE



USER GUIDE

Version 1.3.3

29. Feb 2024

U-HE - HECKMANN AUDIO GMBH - BERLIN

Table of Contents

Introduction	3
Installation Resources The Satin Story Features and Specifications User Interface	3 4 5
Quick Start Guide	
Preset Browser	9
Overview Directory Panel Presets Panel	10
Drag & Drop	
Preset Info Panel	
Installing Soundsets	
Preset Tagging Search Functions	
Upper Panel	21
Lower Panel	23
Studio Mode	23
Delay Mode	
Flange Mode	
Service Panel	29
Tape Machine Primer	29
Tape Parameters	31
Repro Head Parameters	
Analyzer	
Circuit Parameters	
Configuration	36
MIDI Remote Control	36
Preferences Page	
The Sample Rate Issue	40
Tips and Tricks	41
Frequency Response Plots	44
NKS	57
Glossary	58

Introduction

Installation

Go to the <u>Satin page</u>, grab the appropriate installer for your computer, unZIP and run it. Satin is fully functional in demo mode except for a mild crackling which disappears after authorization.

By default, Satin uses the following directories:

Winpresets (Local)C:\Users*YOU*\Documents\u-he\Satin.data\Presets\Satin\presets (User)C:\Users*YOU*\Documents\u-he\Satin.data\UserPresets\Satin\preferencesC:\Users*YOU*\Documents\u-he\Satin.data\Support\ (*.txt files)

If a previous installation into the *VstPlugins* folder caused no problems, you can reinstall there.

Mac presets (Local) Macintosh HD/Library/Audio/Presets/u-he/Satin/

presets (User) Macintosh HD/Users/*YOU*/Library/Audio/Presets/u-he/Satin/

preferences Macintosh HD/Users/*YOU*/Library/App...Support/u-he/com.u-he.satin...

resources Macintosh HD/Library/Application Support/u-he/Satin/

To uninstall, delete the plugin files, then Satin.data (Windows) / the two Satin folders (Mac). Please read all relevant texts included with the installer, especially *license.txt*.

Resources

For frequency response curves, go to <u>satin plots</u>
For support, news and downloads, go to <u>u-he.com</u>
For lively discussions, go to our KVR <u>forum</u>
For online friendship, visit us on <u>facebook</u>
For tutorials and more, go to our <u>youtube channel</u>
For extra presets, go to <u>patchlib</u>

Satin code by Sascha Eversmeier

u-he team 2024 (Q1)

Urs Heckmann (concepts, code)

Jayney Klimek (accounting, procuration)

Howard Scarr (sound design, user guides, grump)

Sebastian Greger (UI design, 3D graphics)

Jan Storm (framework, hardware code)

Oddvar Manlig (business development)

Viktor Weimer (customer support, sound design)

Thomas Binek (QA, betas, customer support)

Henna Gramentz (office coordination, customer support)

Frank Hoffmann (framework, browser)

Alf Klimek (studio, voiceovers)

Sebastian Hübert (media creation)

David Schornsheim (framework, CLAP)

Kay Knofe (hardware development)

Tim Fröhlich (more code)

Sadjad Siddiq (DSP code)

Petros Karagkounidis (backend development, IT admin)

Simon Shrape (web development)

The Satin Story

The quality of recent audio applications would have been unthinkable just a few decades ago. Now we have crystal-clear sound, miles of headroom, finest resolution. Perfection, the Holy Grail...

But do we really want perfection? Legendary audio engineers enthuse about the special sound of vinyl and magnetic tape. Some even say the truly great albums only came alive because of the imperfections (in both performance and technology), and that absolute perfection would be boring.

Perhaps that should be taken with a pinch of salt, but one thing is certain: our ears are thoroughly analogue, human hearing follows rules similar to those in mechanical and electromagnetic recording processes. The most important lesson here is that nature itself is non-linear.

Tape recording and playback involves a whole host of non-linearities. Although only a few of them are immediately discernible, they all contribute in one way or another to the final sound: like e.g. guitar strings and bodies they *interact*. In real life, things can get complicated!

non-linearities typical of tape machines

- · magnetic tape saturation
- smoothing / blurring of transients
- · compression of high frequencies
- · 'head-bump' effect
- · asperity '3D' effect
- · 'glue' effect with multiple tracks

When we first started outlining the concept, we had little idea just how much research and functional testing would be involved.

Satin's specifications also grew far beyond what we originally planned. While most of the 'modeling' plug-ins emulate a single piece of hardware, we were aiming for a true all-rounder with a highly flexible character... the tape machine equivalent of Diva, our analogue modeling synthesizer.



We decided to model each element of a real tape machine as a separate unit within a modular architecture, as this would allow us to shape the sound in more ways than the original. The core parameters accurately emulate all the important electrical and electromagnetic processes, but Satin's alternative modes and 'service' parameters make it a more flexible processor than any real world tape machine could ever be. Satin isn't a one-trick pony, it's a tape effects construction kit.

So, apart from delivering authentic tape machine effects, Satin is capable of much more 'left-field' tape sound processing (including tape flanging and multi-tap delay).

about sample rates

It recently (2023) came to our attention that some parts of Satin can respond differently depending on the current sample rate. For the full story, go to <u>The Sample Rate Issue</u> on page 40.

Features and Specifications

- Internal sample rate: 352-384kHz (depends on project sample rate, 8 x oversampling 44.1kHz)
- Bias oscillator frequency: 118 to 128kHz
- Bias level: variable, +/- 5 dB
- Tape speed: 1.875 to 30 inches per second, continuously variable
- Tape types: vintage, modern
- Total harmonic distortion (at -20dB Input, 30 ips, bias +2dB, AES30-EQ)

vintage 2.4% modern 1.2%

Wow & Flutter, maximum (DIN 45507/IEC 60386)

vintage 0.55% at 1.875 ips to 0.28% at 30 ips modern 0.52% at 1.875 ips to 0.19% at 30 ips

Record / repro EQ standards (individually selectable)

IEC/CCIR 7.5 ips, IEC/CCIR 15 ips

NAB

AES 30 ips

Compander types (standard noise reduction systems in Studio mode)

A-Type, A-Type mod

B-Type

uhx Type I or II (improved since v1.1.0)

• Frequency response (+/-2 dB, -12dB input, Modern tape, pre-emphasis 50%)

1.875 ips 35Hz to 9kHz (IEC 7.5) 3.75 ips 25Hz to 15kHz (IEC 7.5) 7.5 ips 27Hz to 18kHz (IEC 7.5) 15 ips 35Hz to 20kHz (IEC 15) 30 ips 40Hz to 22kHz (AES 30)

Pre-emphasis (18kHz)

1.875 ips 0 to 56dB 3.75 ips 0 to 48dB 7.5 ips 0 to 40dB 15 ips 0 to 33dB 30 ips 0 to 27dB

Maximum delay times (in Delay mode)

1.875 ips 4.267s 3.75 ips 2.133s 7.5 ips 1.067s 15 ips 533ms 30 ips 267ms

Input headroom 0 to +18db
 Gap width (repro head) 1 to 5µm

Head bump 0 to 8dB, typically 4dB

Crosstalk (at 1kHz) -80 to -20db
 Static tape noise -100 to -40dB
 Asperity / mod noise -100 to -50dB
 Azimuth range +/- 2 arc-minutes

• 0 VU reference level -24 to 0dBFS (AES-17 standard)

System noise -120db

User Interface

GUI appearance

The size of Satin's user interface can be adjusted to suit your personal preference / monitor size – simply right-click anywhere in the background of Satin's window (if the MidiLearn menu pops up instead, try clicking a bit further away from the knobs). Select a GUI size between 70% (854 x 504 pixels) and 200% (2440 x 1440 pixels) in 10% steps.

Note that the setting here is temporary. You can set a default GUI size in the global <u>Preferences</u>.

knobs

coarse control.....Click+hold with the lefthand mouse button, then drag up or down fine control.......For steps of only 0.01, hold down either SHIFT key before moving the knob scroll wheel.......Hover over a knob and roll the wheel (fine adjustment via SHIFT) reset to default....Double-clicking a knob reverts to a default value (e.g. tape speed = 15 ips)

switches



Although they look similar, Satin actually has three different kinds of switch. Some slide left to right (like the one in this image), others are on/off types that are only highlighted when switched on. The Studio panel's *Group* switches are mutually exclusive 'radio buttons'.


parameter locking



Clicking with the righthand mouse button on any knob or switch in Satin opens a tiny context menu containing only Lock. A locked parameter can still be adjusted, but the value won't change when you switch presets, and it won't affect (or react to) other instances of Satin assigned to the same Group. To unlock a control again, right-click and untick 'Locked'.


the control bar

The bar at the top of Satin's window is almost self-explanatory – see the next page, then go here.



the main panels

The rest of Satin's GUI is divided vertically into three panels:

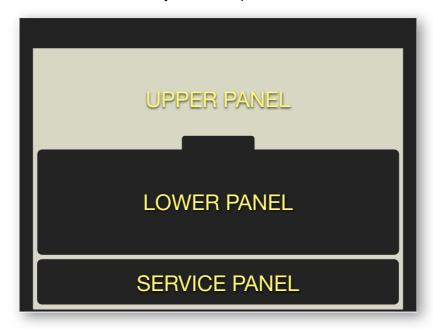

Upper Panel

Together with the control bar, this area always remains visible because all the controls apply in any of Satin's operation modes (see *lower panel*). For more about the upper panel, go <u>here</u>.

Lower Panel

The *Mode* selector in the middle switches the functionality and appearance of the lower panel...

Studio: Use this mode whenever you want to add some tape machine 'sheen'. Satin lets you group multiple instances together. For more about Studio mode and Groups, go <u>here</u>.

Delay: This mode emulates a monster tape machine with four stereo repro heads set up for delays. For more about Delay mode, go <u>here</u>.

Flange: Emulates classic tape flanging, a dramatic analogue 'whoosh' effect that requires skill and practice. Satin can do this automatically. For more about Flanger mode, go here.

Service Panel

In typical studio sessions of the past, a well-calibrated multitrack tape recorder was essential for professional work – assuming you wanted the highest audio fidelity possible. A technician would sometimes have to adjust the bias (pre-magnetization) to suit the kind of tape being used, the aim being to optimize the recording system for a flat frequency response with minimum distortion.

Most of the parameters in Satin's service panel practically reconfigure or even replace the virtual 'hardware': For instance, changing the head gap width would mean replacing expensive parts. For more about the service panel, go <u>here</u>.

Quick Start Guide

To use Satin purely as a 'tape sound' processor i.e. to add some tape-typical warmth and cohesion (enough flowery words for now), all you really need to do is experiment with the two large gain controls at the top: the **Input** and **Output** knobs...



Here goes: Insert an instance of Satin into an audio channel of your DAW / host application (a default preset will be loaded) and play around with the Input control. Watch the VU meter, but concentrate more on the *sound* i.e. what Satin is doing to your audio material.

You can compare with the untreated signal by clicking on the *Bypass* button. But beware! Judging which settings actually sound better means keeping the perceived volume as constant as possible – volume can be a significant factor here, as louder almost always sounds 'better'.

Check whether **Makeup** is switched on. If so, the output level is automatically reduced when the input is increased (note that the Output knob doesn't move automatically, so you can always 'fine-tune' the output level).

A few questions you should be asking yourself while adjusting the input and output levels:

- What's happening to the transients in the signal when I give it more 'oomph'?
- · How are the high frequencies in particular being affected by different settings?
- At what point does the signal start to distort? In which frequency range?
- What is happening to the (perceived) stereo width at different gain settings?

Depending on certain properties of the audio material, these effects can be quite subtle, especially if you are not very familiar with the 'tape sound'. Tip: You could train your ears by processing very different audio material e.g. drums, vocals, bass. After some practice, you should start to develop a feel for the above processes and how they interact.


Patience helps, and the cumulative effect of applying Satin to several (or even all) tracks in a song will make everything appear more obvious (see groups).

the next few chapters include a description of each and every element in Satin's user interface...

Preset Browser

Overview

You can load any preset in the current folder by clicking on the data display, or step through presets by clicking on the arrow symbols either side of the data display. Of course Satin also includes a preset browser – click on the PRESETS button to the right of the Data Display:

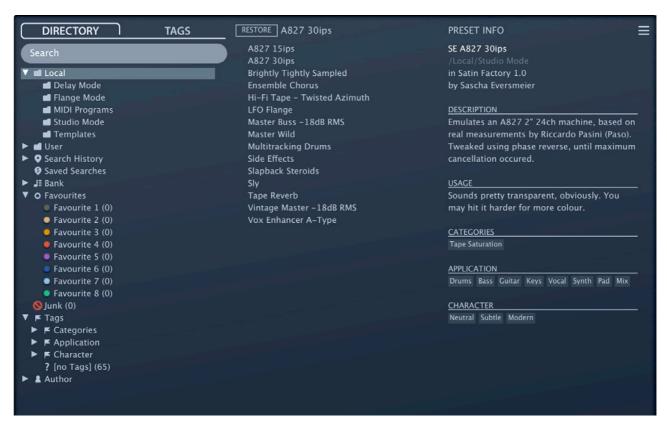

Folders are on the left, presets in the centre and information about the current preset on the right. If you can't see any presets at all in the central area, click on Local. If you can't see the PRESET INFO panel, click on the button in the top right and select *Show Preset Info*.

The Local root directory contains a representative selection of presets copied from the subfolders. After loading a preset (by clicking on its name) you can step through all the others using your computer's cursor keys.

That's all you really need to know for now!

For users who want to dig deeper, however, Satin's browser offers many interesting features, including a powerful search engine. For details, please read the rest of this chapter.

Default preset

When Satin starts it checks whether the Local root contains a preset called *default*, which is then loaded instead of the standard one. Note: Any preset called *'default'* will not appear in the browser.

Directory Panel

If you don't see this panel on the left of the browser, click on the DIRECTORY tab.



Local

The factory presets are sorted into 4 main folders: *Delay Mode*, *Flange Mode*, *Studio Mode* and *Templates* (just 4 "vanilla" presets – read the <u>Preset Info</u> about each one)

We recommend that you do not add or remove any presets here, but save all your own creations as well as presets from third parties to 'User' folder.

MIDI Programs

'Local' also contains a special folder called 'MIDI Programs' which is normally empty. When the first instance of Satin starts, up to 128 presets from that folder are loaded into memory, to be selected via MIDI Program Change messages. Certain DAWs automatically route MIDI into effect plug-ins while others achieve the same via more complicated means. You might have to spend some time looking through the appropriate documentation for information on how to do this!

As the presets in MIDI Programs are accessed in alphabetical order, it makes sense to prefix each name with an index '000 rest-of-name' to '127 rest-of-name' or similar. IMPORTANT: Unlike regular presets, MIDI Programs can't be added, removed or renamed on the fly. Changes will only take effect after the host software is restarted.

The MIDI Programs folder can contain up to 127 sub-folders of 128 presets, switched via MIDI 'Bank Select' messages (CC#0) preceding the Program Change message. The MIDI Programs folder itself is bank 0, sub-folders are addressed in alphabetical order starting with bank 1.

When Satin receives a program change, it will display the bank and program numbers to the left of the preset name e.g. "0:0" for the first preset in the first bank. In certain hosts, however, the first bank / preset is designated "1" instead of the correct "0".

To avoid another possible source of confusion, please make sure that there are no junked presets in the MIDI Programs folder. All files there are adressed, even if they are hidden.

User

The best address for your own creations as well as presets from other sources. You can either select *User* immediately before saving the preset, or set a global preference which ensures that it will always be saved to this folder – see the <u>preference</u> *Save Presets To*.

Tip: It's worth finding out where the User folder actually resides on your computer. Right-click on the User folder and select *Open in Finder | Explorer*.

Smart Folders

The other folders do not contain files, but display the results of querying a database of presets. The content is therefore dynamic i.e. it will change whenever the underlying data changes.

You can drag & drop any smart folder content onto e.g. 'User' or the desktop (see <u>External Drag & Drop</u>) to create folders containing real copies of those presets!

Search History

Click on this folder to display the results of past searches (maximum 10). Whenever you need to make the results of a search more permanent, right-click and select save Search... The entry will be moved to the Saved Searches folder – see below. To remove all searches from the list, right-click on the Search History folder and select clear.

Saved Searches

This folder contains searches that have been saved via right click from Search History. To remove individual saved searches, right-click on the search and select delete. Tip: Entries dragged from Saved Searches and dropped onto real folders within Local or User will create a folder containing copies of all found presets!

Banks

These smart folders reference metadata about preset origin – the version of the factory or third party library with which the preset was installed. See <u>Preset Info</u> a few pages down. Banks are predefined for factory presets.

You can even create your own custom banks: Drag & drop one or more presets onto the 'Bank' folder then enter a suitable name into the dialogue box.

To remove Bank attributes from selected presets, either drag & drop them onto the 'no Bank' folder you will see at the bottom of the Bank list, or right-click on the Bank and select Remove Presets from Bank. Empty Banks will disappear.

Favourites

8 smart folders, one for each Favourite colour. See <u>Presets context menu</u> a few pages down. Only one Favourite colour/number can be set per preset. Presets dropped onto one of the Favourites folders will be marked as such. Favourite status can be removed from all presets of one particular colour by right-clicking on the 'Favourite' folder and selecting *Remove All Favourite (n) Marks*.

Junk

A smart folder pointing to all junked presets. See <u>Presets context menu</u> on the next page. Presets dropped here will disappear from the rest of the browser unless made visible (see *Show Junk* in the Presets context menu). Like Favourites, Junk can be exported/imported (as Junk.uhe-fav). See <u>External drag & drop</u>.

Tags


Smart folders for each Category, Application and Character tag. Presets dropped onto these folders will adopt the corresponding tag. Presets dropped onto the Untagged folder will have all Category, Application and Character tags removed.

Author

Smart folders for each Author. Tip: Instead of signing each of your creations, you could sign just one of them, then select them all and drag them onto Author/(You)/. As the process cannot be undone, please use this feature with caution!

Directory Context Menu

Right-clicking on any folder within Local or User will open this menu:



Refresh

Update the contents of the browser. Depending on your operating system, this may be necessary after you have moved, added, removed or renamed any folders or presets using Explorer / Finder.

Create New...

Insert an empty subdirectory.

Rename...

Edit the folder name.

Open in Finder / Explorer

Opens a system window for the clicked folder. After adding, removing or renaming preset files or folders outside of Satin's own browser, remember to refresh the directory (see *Refresh* above).

On Open Expand to

These options determine how deeply the browser will open subdirectories whenever the GUI is opened again or the refresh function is called. The first option (*none*) collapses all folders, while the final option (all levels) reveals all nested folders.

Hidden Folders


Select the smart folders you don't want to see.

Show Folder Icons

Deselect this option if you find the folder icons distracting.

Presets Panel

The central, unlabelled area of the browser is where you click to load presets...

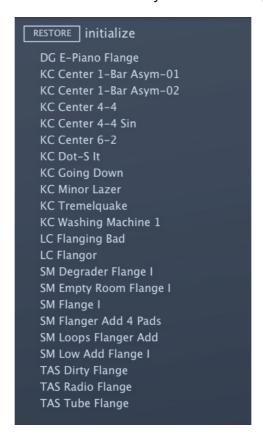

Presets context menu

Right-click to open a menu containing functions that can be applied to individual presets.



Mark as Favourite

Choose one of 8 'favourite' marks. The selected entry will be replaced with unmark as favourite.

Mark as Junk

Instead of deleting presets, you can mark them as 'junk' so that they disappear from the browser...

Show Junk

Activate this option to display junked files (see above) marked with a STOP symbol instead.

Select All, Deselect

See Multiple selection below.

Rename...

You can change the names of presets using this function. Note that only the most recently selected preset can be renamed i.e. you can't rename multiple files at once.

Copy to User Folder / Duplicate

The entry here depends on the status of the preference <u>Save Presets To</u> and whether the source presets are in the Local or User folder. Selected presets are copied with an index appended to the name (like the 'Auto Versioning' preference).

Show in Finder / Explorer

Opens a system window for the right-clicked file. In smart folders only, holding down an *option* key (Mac) or *ctrl* key (Windows) replaces this entry with *Show in Browser*, which shows the currently selected file in its original location within Satin's browser.

Convert to native / h2p / h2p extended / nksfx

Converts the selected preset(s) to the format previously selected via right-click on the SAVE button. The *nksfx* option is only available in the VST2 version – see the <u>NKS</u> chapter.

Copy / Paste

Clipboard functions. Individual or multiple presets can be copied then pasted elsewhere, even between Satin's browser and system windows (Finder, Explorer).

Move to Trash / Recycle Bin

This function moves all selected preset(s) to the system trash. Caution: This also works on files in <u>smart folders</u> i.e. the **originals** will land in the system trash.

RESTORE

While in the browser you can audition presets for as long as you like without losing track of the one that was previously loaded: Clicking the Restore button gets you back to where you started.

Multiple selection

A block of adjacent presets can be selected via shift+click, and individual presets can be added to the selection via cmd+click (Mac) / alt+click (Windows). Presets can be moved to a different folder via drag & drop. To deselect, either click on a deselected preset or pick *Deselect* from the context menu.

Drag & Drop

Internal

You can drag and drop single or multiple files from the preset panel onto any folders in the directory panel. Files dragged onto regular folders will be moved unless you hold an *option* key (macOS) or *ctrl* (Windows), in which case they will be copied instead. Files dropped onto smart folders will adopt the attribute of that folder: For instance, you can set the Author or Favourite status of several presets at once.

External

To manage your preset library externally you can drag presets and folders between Satin's browser and your desktop (or any system window). On the Mac most Finder operations will automatically update the browser. Updating might not be immediate when using multiple formats or multiple host applications, but all it usually takes is a click on the GUI or in the directory tree (sets the focus to the clicked instance of Satin). On Windows systems, a Refresh (see <u>Directory context menu</u>) will be required before changes to the contents of the browser appear.

Another little helper: If you drag a Satin preset from e.g. your desktop and drop it onto the Data Display, that preset will be loaded (but not automatically saved).

Exporting smart folders

Drag any smart folder onto the desktop to create a new folder containing those presets. Drag an entry from your Search History, or the Category 'Saturation', Favourites or one of the Authors.

Exporting favourite / junk status

You can export Favourite status, all at once or individually: Shift+click and drag the 'Favourites' folder onto the desktop to create a file called Favourites.uhe-fav. Similar for sub-folders: If you shift+click and drag e.g. 'Favourites 5', this will create a file called Favourite 5.uhe-fav.

The same method works for Junk status, creating a file called Junk.uhe-fav. Such files can be imported into Satin's browser on a different computer (for instance), via drag & drop onto (or anywhere within) the Favourites folder, or to the Junk folder.


Note that importing .uhe-fav files from another computer will only work 100% correctly if all preset names and locations are identical on both computers!

Note for Windows users

According to Microsoft, drag & drop will only work between applications with the same rights (i.e. both admin or both normal) for security reasons. If the host was started using the "run as admin" option, drag & drop functionality will be limited: You can still drag objects between plug-ins, or from the plugin into system windows e.g. your desktop. However, attempts to drag & drop anything into the plugin from outside the host will fail. This applies to presets, folders, favourites, *.uhe-soundset* files or indeed anything that can be dropped onto the plug-in GUI

Preset Info Panel

The panel to the right displays information about the selected preset:

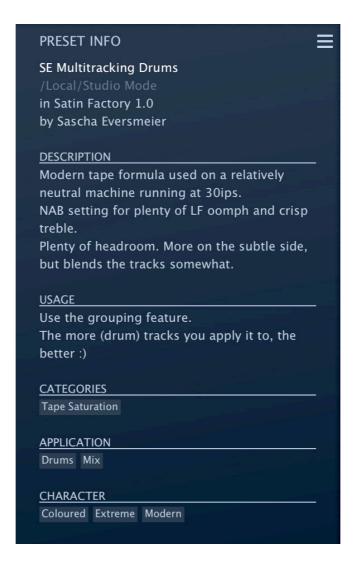

If you can't see this panel, click on the button in the top right corner and tick Show Preset Info.

Below the preset name you should see its path (from /Local or /User), the Bank and the Author (which also appear as Smart Folders).

DESCRIPTION and USAGE text is entered immediately before saving a preset.

CATEGORIES, APPLICATION and CHARACTER are the tags for the current preset. You can remove or add tags directly – see 'Tagging via PRESET INFO' a few pages down.

If you prefer to see less information, hide the tags only or the entire PRESET INFO panel. The FLAG button opens the Tagging window.

Installing Soundsets

Any soundsets we distribute ourselves will (eventually) be available in *.uhe-soundset* format. Third parties are also encouraged to use this package format for their own commercial soundsets (for details please contact our support team).

Standard Method

To install, drag & drop the .uhe-soundset file into Satin – anywhere will work. The soundset should appear in the 'User' folder. If a soundset with the same name already exists in that location, any modified files will be backed up and the location of the backup file will be displayed.

Alternative Method

Soundsets in .uhe-soundset format can also be installed by clicking on the u-he badge, selecting Install Soundset... from the menu and navigating to the .uhe-soundset file. This option is especially useful for Linux, as the browser version for that platform does not support drag & drop.

Regular Folders

Folders containing Satin presets can be manually copied or moved into the 'User' folder. You might have to refresh the browser (see <u>Directory context menu</u>) before they appear there. A refresh is generally necessary in Windows but not in macOS.

Note: As .uhe-soundset files are basically ZIP-compressed folders, you can rename them i.e. replace the long file extension with 'zip', then extract the presets and documentation.

Preset Tagging

"Tags" are elements of metadata, information that you can add to presets so that they can be found according to certain attributes.

IMPORTANT: Clicking on SAVE isn't required, as tags are updated automatically. The obvious advantage is that presets don't have to be saved every time you edit tags. The main drawback is that you should only edit tags after saving your preset. If you edit tags while in the process of creating a new version of something, you would also be changing the tags in the original preset!

The Tagging window

Right-click on the [SAVE] button and select *Tag this preset*:



Category describes a preset by process type, **Application** offers technical classifications, and **Character** tags are pairs of opposites from which you can choose only one.

Tagging via PRESET INFO

In the <u>PRESET INFO</u> panel, right-click on CATEGORIES, APPLICATION or CHARACTER and select or deselect tags from the context menu. Tip: If you right- click on an existing tag, the first option in the menu becomes *Remove Tag.*..

The function *Create Search from Tags* searches for presets with ALL the same tags.

Tagging via the Tags smart folder

You can also tag presets by dragging & dropping them onto one of the 'Tags' smart folders. To remove all tags, drag them onto the '[no Tags]' smart folder.

Search Functions

Search by Tags

Click on the TAGS tab to open this view. The buttons here let you set up search criteria according to existing tags with just a few mouseclicks:



There are four sets of buttons. The first three correspond to the tags in the tagging window (see the previous page), and the bottom row lets you find any presets tagged as Favourites. Clicking on the [^] icon to the right of each heading hides the options for that set of tags.

Practically...

Click on the DIRECTORY tab, right-click on the 'Search History' smart folder and select *Clear*. Double-click on 'Local' to restrict the scope of the search to that particular folder (presets in the 'User' folder will not appear in the search results now). The selected path appears immediately below the Search field. To exit the "restriction" folder again, click on the 'up' [^] symbol to the left.

Click on the TAGS tab and select the Categories [Chorus] and [Tone]. Presets tagged with either of those categories will appear in the presets panel. Click on the DIRECTORY tab again: The text "#Modulation:Chorus #Filter:Tone" appears in the Search field and in 'Search History' (which also shows the number of presets found in the search). If you are feeling adventurous, try editing the contents of the Search field now – the results are updated accordingly.

Unlike selecting several Category tags, which will expand the scope of the search, selecting Application, Character or Favourites tags will **restrict** the scope i.e. you will get fewer hits.

Search by Text

The Search field lets you find presets according to a string of text. Here's an easy example: If you remember that the preset you're looking for has the word "clock" in its name or description, enter "clock" into the Search field and hit [Return]...

The search routine normally looks into the preset name, author, the DESCRIPTION and USAGE (see the PRESET INFO panel). Searches are not case-sensitive, and quotes are not required unless you need to include spaces between words.

To restrict the search to a particular **search path**, double click the folder. This path will appear immediately below the Search field. The [^] button to the left moves the Search path up one level, while the [X] button to the right sets the search path to the default (all Satin presets). Alternatively, you can navigate directly to any higher level by right-clicking on the path.

Try it: Enter three or four letters then hit [Return]. For instance, *star* will find all files containing the text string *star* (e.g. *mustard* or *starters*). Entering "*star wars*" (with the quotes) would find e.g. *Battlestar Warship*, if such a preset existed.

Scope

You can limit the scope of the search to just the preset name or specific parts of PRESET INFO by using *name* (preset name), *author*, *desc* (description) or *use* (usage) followed by a colon. For instance, *author:the* finds all presets by sound designers whose author names contain 'the'. Similarly, *desc:space* will find all presets with the word 'space' in the description.

Logic

The following logical operators can be used between text strings, but not between tags.

AND requires that presets contain both words. It can be written explicitly, but is not necessary. For example, *star AND wars* (or simply *star wars*) will find presets that contain both 'star' and 'wars'.

OR means that presets can contain just one of the words... or both. For example, *star OR wars* will find presets that contain 'star' as well as presets that contain 'wars'.

NOT excludes presets containing the specified word. To find all presets that contain 'star' but don't contain 'wars', enter *star NOT wars*.

Including Tags

Tags can be entered into the Search field if preceded by a '#'.

For example, *name:int #Delay:Tape* will find presets with "int" as part of the name that are tagged with the *Tape Delay* category.

In the current version of the browser, tags must appear **after** any text. For technical reasons, they take the form #type:category (the type is invisible in the TAGS panel).

Upper Panel

This part of Satin's window contains all the basic switching and tape machine parameters:



Bypass

Activating this button disables all processing. Note that <u>grouped</u> instances are bypassed together!

Data Display

The display at the top shows the name of the selected preset or, while a parameter is being edited, its current value. Clicking on the arrows to the left and right of the data display steps forwards and backwards through presets. Clicking directly on the data display opens a list of all presets in the current directory (so you don't always have to open the browser to select presets).

Recently added feature: If you drag a preset from outside the plugin and drop it onto Satin's data display, that preset will be loaded (but not automatically saved anywhere).

Initialize / Legacy mode

Right-clicking on the data display opens a small menu where you can initialize all settings to their default values (*init*), and choose between the 1.3.3 Mode (Native) and Legacy Mode (which makes Satin almost compatible with older versions – see The Sample Rate Issue for the full story).

Presets / Save

See the chapter describing Satin's preset browser.

Undo / Redo

The *undo* and *redo* buttons let you step back and forwards again through the edit 'history'. Although the number of steps in the buffer is limited to 30, you can even undo a change of preset – so switching presets before saving doesn't mean losing your work.

u-he Badge

Click to open a dropdown menu containing links to this user guide, to the documentation folder, to our website, to our user support forum at KVR as well as to our address in various social networks.

Cogwheel

Opens the Configuration pages.

Makeup

When *Makeup* is switched on, the output level is automatically reduced when the Input knob is turned up (the output level is effectively linked to the Input knob). Note: the Output knob doesn't magically turn while you're adjusting the Input, you can still use it to fine-tune the output level.

Caution: Turning the input volume way down while *Makeup* is on can seriously increase hiss and asperity (see <u>tape parameters</u>). Also, in <u>Delay</u> mode, quickly turning the input volume down can cause the delayed signal to get very loud for a short while.

Tape

This switch affects the type of emulated tape. When driven into saturation, the 'vintage' tape tends to distort sooner. It loses treble, and the low-to-mid range is stronger. The thinner modern tape has a more even response, less distortion and doesn't lose as much treble.

Metering

This switches what the VU meter (see below) displays: either the input or the output levels.

RMS

This feature affects how the VU meter displays output levels. When RMS is disengaged, the VU meter follows its traditional 'ballistics', which means about 300ms integration time – a good compromise for monitoring fluctuations in the human voice as well as most musical instruments. Engaging RMS causes the VU meters to react more steadily to the *energy* content of the signal.

0VU Ref

Having a standard reference while monitoring average (RMS) levels within a project makes a lot of sense. For example, if your project is at -18 dBFS, it would be best to set -18.00 here. The VU needles will be displaced by -18dB so that e.g. -20dB will appear as -2dB.

Soft Clip

When the button is engaged, output levels approaching 0dBFS are gently limited using a very smooth transfer function similar to a Class-AB tube or FET-driven amplifier stage that gradually changes from clean to clipped. Disengage the button If you want the occasional peaks to be handled elsewhere within your mixing environment (overshoots are only visualized, not treated).

Input / Output

These knobs adjust input and output levels. They are so large because they are the most important controls in Satin! *Use them wisely, young Skywalker...*

VU meter

Volume Unit (VU) meters are often seen 'decorating' audio equipment, from the most expensive professional units where they actually make sense, to the cheapest consumer devices where they are included more for aesthetic reasons than for precise monitoring.

VU meters have a relatively slow response, which is perfect for measuring average levels. Traditionally, users were expected to aim for 0 VU whenever possible.

Note: Satin's VU meter complies to the AES-17 standard. It displays a 0dBFS sine wave as 0 VU – a non-AES-17 meter would show about 3dB less.

Peak Meter: The central bar is a stereo peak meter with a significantly faster response than the VU needles. Use the peak meter to monitor the levels of faster transients e.g. drums.

MIDI Activity

This indicator flashes whenever Satin is receiving MIDI data.

Lower Panel

Mode

Switches between Satin's three basic operation modes: Studio, Delay or Flange.

Studio Mode

This is Satin's default, the mode you should use for all your 'normal' tape processing tasks:



Speed ips

How quickly, in inches per second, the virtual tape is drawn past the heads. Faster tape speed usually means better overall audio fidelity (especially with high frequencies) and less noise. Also, the lower frequency limit moves up slightly. How these effects arise is described in the chapter about Satin's <u>service panel</u>. Note: The most common tape speeds are 7.5, 15 (default) and 30 ips.

Pre-Emphasis

Pre-emphasis has nothing at all to do with the <u>EQ</u>, it mainly addresses the 'gap loss' phenomenon. The gap of the repro head determines its high frequency response – the smaller the gap, the better the response. Wavelengths smaller than the gap width more or less *fall into the gap*, the worst case being when the wavelength is exactly the same as the gap width, resulting in zero current. This gap loss frequency is proportional to tape speed: about 8kHz at the regular 15 ips (16kHz at 30 ips and 4kHz at 7.5 ips). See the response plots showing <u>rolloff without pre-emphasis</u>.

No Group

NOT assigning an instance of Satin to any group is the default state, and pressing the momentary button *No Group* reverts to this default. See Group 1-8 below.

Bypass Tape

Press this button to take the tape section out of the main signal path. The compander and record / repro circuits remain active. The "off" state of this button is ignored in Delay and Flange modes.

Group 1-8

Studio mode lets you assign the current instance to one of eight groups. Each group acts as a container for all instances so they behave as a single entity while editing. This comes in handy when using Satin as a multi-track processor (for a practical example, see <u>Multitrack Coherence</u>). Groups can be named by double-clicking on the fields.

Important: Using groups in simultaneously opened projects in your host application(s) can lead to unexpected results – the groups of one project will be overwritten by those defined in the next. Also please note that Satin cannot be grouped if the processes are sandboxed. If you find that Satin's grouping feature does not work as described, please refer to the documentation for your DAW.

Compander

No tape machine plugin should be without a noise reduction encoder/decoder! Use these for coloration effects or e.g. decoding old cassettes which have been recorded with noise reduction. Satin includes 5 types – all models of well-known hardware, despite the "obscured" names...

A-Type

First implemented in early professional video recorders, this type also became the noise reduction standard for multitrack tape and, to a lesser extent, optical movie soundtracks. A-Type processes four different frequency bands, with the two higher bands overlapping so that typical tape hiss frequencies are companded more strongly. The A-Type typically provides about 12 dB of noise reduction (A-weighted). Click here for a related article in Wikipedia.

A-Type Mod

This type mimics the 'Cat-22' modification that was popular among users of the original A-type hardware from the early 1970s. All four bands were realized on a single card, and the signal that was added to (or subtracted from) the main path was mixed via four resistors. By simply cutting or desoldering the resistors of bands 1 and 2, only the treble bands remained active, resulting in the very 'airy' sound heard on numerous hit records. See the dolby trick.

A-Type Mod works especially well with vocals, acoustic guitars or anything that would benefit from a very 'up-front' and bright top end without sounding harsh or shrill.

B-Type

This was added to countless consumer products, for instance pre-recorded compact cassette tapes. B-Type is a single-band system that only processes high frequencies. With its relatively mild compansion, B-Type typically provides about 9 dB of noise reduction (A-weighted).

uhx Type I

This 2:1 compander was meant for professional systems using tape with a signal-to-noise ratio of at least 60 dB and a flat (+/-3 dB) frequency response from 30 Hz to 15 kHz.

uhx Type II

This type was meant for cheaper, more noisy consumer media with a more restricted frequency response. Type II rolls off high and low frequencies in the control signal path (the sound isn't affected) to desensitize the system to frequency response errors.

Note: Both *uhx* types were improved for Satin version 1.3.1. If either is selected, the *Legacy Mode* button will appear – if you prefer, you can switch this off before resaving.

Same as Enc

Sets the decoder option to the same as the encoder.

Mix

This control should normally be set to maximum, but you can set lower values to soften the effect, especially when using the encoder circuit as an enhancer (see <u>dolby trick</u>). Note: This 'noise reduction' can only reduce on-tape noise, not noise generated before the plug-in. This also applies to 'system noise' generated by the analogue-modeled circuitry.

Delay Mode

With so much 'tape goodness' already built into Satin, it made sense to include a tape delay mode:



Delay mode panel with two repro heads



Delay mode panel with four repro heads

Repro Heads

The sliding switch at the top left selects whether you will be presented with 2 or 4 repro heads for the delays. Selecting '2' here saves a few CPU cycles and memory.

Speed ips

How quickly, in inches per second, the virtual tape is drawn past the heads. Faster tape speed usually means better overall audio fidelity (especially with high frequencies) and less noise. Also, the lower frequency limit moves up slightly. How these effects arise is described in the chapter about Satin's <u>service panel</u>. Note: The most common tape speeds are 7.5, 15 (default) and 30 ips.

Note: Unless *Tempo Sync* (see below) is active, delay times will depend on the current tape speed: the faster the tape, the shorter the delays. While *Tempo Sync* is on, Speed ips only affects the colour of the sound (of course this would be impossible using a real tape machine).

Tempo Sync

In *Tempo Sync* mode, delay times are relative to song tempo. Distances between the repro and recording heads are set in musical note lengths relative to a tape speed of 15 ips). See <u>Distance</u>.

Routing

With the typical *Multi-Mono*, each stereo channel (L & R) feeds the output back into its own input. Selecting *Cross* instead feeds each output to the other input. *Ping-Pong* sums the stereo signal to mono first, then feeds this sum to either the left or right input. Note: if the Balance (see below) is set to the extreme opposite stereo channel from the Ping-Pong, you won't hear any delay.

Distance

These sliders set the distance (in inches) between each repro head and its record head. The delay times depend on the current tape speed except in *Tempo Sync* mode...

When *Tempo Sync* (see previous page) is active, clicking anywhere on the **track** of the slider then dragging left or right will snap to 16th-note values. Note that the centre position corresponds to 4/16 i.e. a quarter note. When the **slider** is clicked and dragged in the normal manner, you can set arbitrary values and/or fine tune them by holding down SHIFT beforehand.

Mod Rate / Mod Amount

The distance i.e. length of each delay can be independently modulated by a sine wave LFO. Use this feature whenever you need extra movement or more 'organic' textures. Careful editing of the modulation parameters here can even result in stunning, reverb-like dispersion effects.

Balance / Level

The *Balance* knobs shift the delayed signals to either side of the stereo field, and the *Level* knobs set the output volumes for each delay.

Mix

The Mix knob adjusts the ratio between unprocessed (dry) and processed (wet) signal. This control is only useful when Satin is used as an insert effect (as it usually is). When used as a send effect you should keep the mix at 100%. The *Lock* feature can come in handy here: While browsing through a bunch delay presets that were created for use as insert effects (with e.g. 50% mix), locking *Mix* at 100% will save you the trouble of adjusting it each time.

Feedback

Delay feedback level. Note that the feedback path is global i.e. the sum of all delays is fed back into Satin's input. With each iteration, the feedback signal is affected by EQ and other parameters.

Limit

Although Satin has 'natural' tape compression (important for typical tape-delay sounds!), we added a dynamic limiter circuit to the output of the feedback stage, to be on the safe side. Imagine having dialed in a complex echo structure using all 4 delay taps: The tape should inhibit very fast buildups, but it will often saturate too quickly. The limiter ensures that levels remain moderate, and can even create interesting 'breathing' effects when driven harder.

Low Cut / High Cut

Cutoff frequencies of a dual filter within the feedback loop. The displayed values are in Hertz (Low Cut: 20 Hz to 2 kHz, High Cut: 200 Hz to 20 kHz). For 'un-filtered' delays, set Low Cut to minimum and High Cut to maximum.

Flange Mode

Tape flanging is actually very different from what is offered by effect units that sweep a resonant phasing effect via LFO. Real tape flanging is more of a one-shot thing, a dramatic whoosh effect for those special moments in the song. Early examples can be heard in the middle of the song *Itchycoo Park* (The Small Faces, 1967), or *Bold as Love* (Hendrix).



True flanging requires two tape machines running identical recordings. The machines are started at approximately the same position, but while tape1 runs at a constant speed, tape2 is slowed down or sped up manually by applying force on the 'flange' of the supply reel. As tape2 can be running either behind or ahead of tape1, the delay between the two can approach 'zero' from either side: That is what Satin emulates.

Tape2 is best kept silent for most of the song, assuming you don't want to hear phase artifacts all the time. As the two tapes approach perfect alignment, the level of tape2 is faded in until the volumes match. As tape2 moves beyond alignment, its volume is faded out again.

Obviously, doing this on real tape machines not only takes skill but also hours of practice. Satin's *Flange* mode can do it automatically, you just have to activate the Trigger (see below).

Speed ips

How quickly, in inches per second, the virtual tape is drawn past the heads. Faster tape speed usually means better overall audio fidelity (especially with high frequencies) and less noise. Also, the lower frequency limit moves up slightly. How these effects arise is described in the chapter about Satin's service panel. Note: The most common tape speeds are 7.5, 15 (default) and 30 ips.

Trigger

This button initiates an automatic flange sweep. The indicator moves forwards or backwards (tape2 is sped up or slowed down). Remote-controlled triggering is possible after <u>midi-learn</u>ing the button. MIDI note-on messages received by Satin will also trigger the automatic flange.

Note: If the Flange is re-triggered while the indicator slider is still moving (as a result of a previous trigger action), the direction of movement is reversed.

Fade

Satin's automatic flange has separate fade-in and fade-out stages which can be set to different durations. You can select absolute times (0.1s, 1s, 10s) or host-synchronized 'note lengths' ranging from 1/64 to 8/1. These are only nominal values, as they can be modified via *Multiply*...

Multiply

The *multiply* control shortens or lengthens the values set by the *Fade* selector – as a multiplication factor for each fade stage with a range from 0.1 to 2 times the *Fade* value.

Shape

These two knobs affect the curvature(s) of the automatic flange effect. Experimentation is key here: The *exponential* curve has a slower rise during fade-in and a slower decay during fade-out, while the *logarithmic* curve has a faster rise during fade-in and a faster decay during fade-out.

Range

Although it can emulate just about everything else a pair of tape machines can do when used as an effect, a processor plug-in simply can't speed up one of the tape machines 'into the future'. However, it suddenly becomes possible if tape1 is already delayed 'into the past'...

It works like this: Tape1 is set to a fixed delay. Tape2 moves from zero delay (tape1's future) through perfect alignment (tape1's present) to twice the delay of tape1 (the past). Or the other way round. In either direction, the two recordings cross in the middle for true *through-zero* flanging.

The *Range* knob determines the maximum delay between the two machines, and also sets the first machine to a static value – exactly half of *Range*. For instance, if you dial in 10ms, the two tapes will meet at 5ms (the static delay of tape1).

Note: Tape1's static delay is also the latency of the flange process. Satin reports this latency to the host software dynamically, but the *Range* parameter is not automatable. How your host application reacts to reported latency is beyond Satin's control – if there is a noticeable lag, please contact the developer of your host application.

Phase Invert

Running two tape machines in parallel would normally mean twice the volume if the two signals are perfectly aligned (as they are in the middle of the flange). Activating the *Phase Invert* button flips the phase of tape2 so that the signals tend to cancel each other out instead.

Tip: For smoothest results, turn wow & flutter down to minimum.

Manual flanging

Instead of triggering the automatic flange, you can grab the slider and move it manually (of course this control can also be midi-learned).

Service Panel

Click on the *Service* button at the bottom of Satin's window to open a panel containing several 'under the hood' controls (as well as a small but perfectly usable analyzer).



Satin's service panel gives you access to much more 'esoteric' parameters

Note: The service panel is closed by default to save on CPU – the analyser actually uses a hidden instance of Satin so it can accurately display frequency response.

To understand everything in service panel, it's best to learn a few basics of tape technology...

Tape Machine Primer

Record head

Getting audio onto tape requires a 'record head', basically a ring-shaped core of ferromagnetic material with a coil of wire wound around it. At the front end of the core, in contact with the tape, is the so-called 'head gap', a narrow space between the poles which turns the head into a kind of horseshoe electromagnet. An input signal is fed into the coil, inducing a magnetic field which then emanates from the head gap and realigns the magnetic state of the tiny metal oxide particles embedded in the tape being dragged past the head. Sounds easy enough, doesn't it? Doesn't it?

Besides being difficult to understand and even harder to explain, there are practical problems. One of them is that you need quite a strong field to budge the normally random magnetic orientation of the metal oxide particles at all – quieter parts of the signal will affect fewer particles and the fidelity of the recording will be (or would be) relatively poor.

DC bias

In the early days of tape recording, the late 1930s, adding some *direct current (DC) bias* improved fidelity by orienting the magnetic state of all particles in one direction. Unfortunately, DC bias practically halves the usable dynamic range of the tape. Another disadvantage is that it leaves the tape with a net magnetization, causing more noise during playback. Still, it was better than nothing.

AC bias

In 1941, two German engineers working for the national broadcasting organization RRG (Reichs-Rundfunk-Gesellschaft if you must know!) accidentally discovered alternating current (AC) bias, which resulted in much better sound quality. The story goes that one of their tape machines was producing exceptionally good recordings. Mystified at first, tests revealed that its DC bias amplifier was generating a high frequency oscillation – that part of the machine was definitely faulty!

The trick of AC bias is to have the audio signal ride (like AM radio) on a high frequency carrier signal, a sine wave somewhere between 50kHz and 200kHz. This frequency is high enough to be filtered out naturally by the repro head, but strong enough to budge all the oxide particles out of their lethargy and allow the audio signal to 'fine tune' their magnetic orientation. The usable dynamic range is not affected much: with AC, everything oscillates around zero so there is no net magnetization on the tape.

Magnetic tape

All tapes, from 1/8-inch cassettes to 2-inch studio reels, have at least two layers: Firstly, a smooth film which gives the tape its physical strength and flexibility. Originally paper, soon afterwards acetate (fire hazard!), since the 1960s mainly polyester.

Secondly, the magnetic coating: tiny iron or chrome oxide particles embedded in a polymer 'binder'. As this layer is in direct contact with the record and repro heads, its physical properties affect how smoothly the tape will run. The density, size and distribution of oxide particles in the binder determine the audio quality and maximum dynamic range of the recording / reproduction.

Repro head

The repro head is physically very similar to the record head, but it works in reverse: When the tape is drawn past the gap in the repro head, the magnetic pattern on the tape induces (via the head gap) a corresponding voltage in the repro head's coil.

The repro head has a kind of highpass filter effect: higher frequencies mean higher voltage (like a bicycle dynamo: the faster you pedal, the brighter the headlamp). However, there's also a lowpass effect affecting the high frequencies: wavelengths shorter than the head gap suffer significant loss, for reasons too complex to discuss here.

Bass frequency response is influenced by the so-called 'head bump' effect, a low frequency boost caused by resonances having to do with the size of the repro head's core relative to its gap. Note that the frequency of the head bump follows tape speed (see <u>response curves</u>).

Equalization

All tape recorders require a lowpass filter behind the repro head, which fixes the following problem: Tape magnetization is directly proportional to the recorded signal, but the voltage induced in the repro head's coil during playback is proportional to the *rate at which this magnetization changes*. So for the same degree of magnetization on the tape, a signal with twice the frequency will be played back twice as loud.


Although the lowpass filter is necessarily shallow (about 6dB/octave), its cutoff frequency needs to be set quite low so it can affect a wide enough frequency range. Such broadband filtering results in a significant loss of overall volume (typically 50 to 60dB), which therefore needs to be amplified afterwards. So the simplest acceptable signal flow would look like this:



Properties such as tape thickness or amplifier response, as well as HF losses caused by the repro head gap, also need to be compensated. There are more idiosyncrasies to be considered (self-resonance in the head coils, eddy current losses in the cores, tape-head spacing losses and so on), but we don't really need to learn such details. Suffice it to say that Satin has all the noticeable quirks of real tape machines, but doesn't make them all user-adjustable – lucky you!

On-tape HF losses and head gap damping can be partly remedied by a kind of pre-filtering called 'emphasis'. This isn't the perfect solution: The louder the input signal, the more saturation you will get on tape, especially of those high frequencies boosted by the emphasis circuit.

Not surprisingly then, attempts were soon made to fix the HF response at the end of the signal chain – at the cost of the some extra circuitry and a bit more tape noise. With the two extra filter circuits in place, the signal flow now looks like this:



Finding the optimum balance between record-EQ (emphasis) and repro-EQ certainly delivers the best sound quality – but how would those tapes sound when played back on a different machine? Wouldn't each manufacturer try to get the best out of their own designs, and 'hang the rest'? This problem was solved by setting frequency curve standards such as NAB or CCIR (later IEC).

Satin's service panel lets you tweak several properties at different points within the signal chain. The service panel is divided into three sections, each containing related parameters...

Tape Parameters

The area on the left of the service panel contains five controls under the heading 'Tape':



the 5 'Tape' parameters in the service panel

Hiss

Controls the level of tape hiss. Although considered a serious disadvantage of tape, a modicum of hiss not only adds 'retro' authenticity and dither to the sound, but can also e.g. reduce the artificiality of existing cuts in comped vocal tracks. Note that Satin's tape hiss is stereo, just like a 2-track tape machine. See *Auto Mute* below.

Auto Mute

Soft-gating for both *hiss* and *asperity*: If no input signal is detected, the tape noise is muted.

Asperity

Imperfections in the surface of the tape cause a roughening / blurring of the recorded frequencies. Although they also cause some constant mid-range noise, asperity noise is mainly perceived as an *enharmonic distortion* of the recorded signal. How noticeable this turns out to be depends on the frequency content of the original signal: if the signal contains very few high frequencies, you should notice an accompanying noise 'tail' when you turn the parameter up. Like 'hiss', asperity noise is also stereo. Strangely, asperity noise can make monaural recordings sound as if they were stereo!

Crosstalk

For 'perfect' stereo or multitrack recordings the tracks should be completely independent at every stage – there should be zero crosstalk between adjacent tracks. Although electronic circuits in a single device can never be 100% isolated, crosstalk is seldom noticeable if the circuits are well-designed. Wherever magnets are involved, however, crosstalk can become a real problem. Adjacent tracks of tape machines are very prone to induction, eddy currents and other unwanted interactions. There is no satisfactory solution.

Crosstalk was included in Satin because it can help to 'glue' stereo tracks together. As synching audio buffers between multiple instances would have significantly increased latency, we restricted the crosstalk to two (L / R) tracks for each instance. See frequency response plots.

Wow & Flutter

Who really likes wobbly recordings? The transport mechanism in tape machines should be steady, and manufacturers of the more expensive models took great pains to ensure the smoothest tape flow possible. A little variance in the recording and playback speed is inevitable, however, and the 'wow & flutter' effect can even contribute to the charm of tape recordings. Satin's Wow & Flutter parameter has a very wide range, from unnoticeable at minimum all the way up to 'horribly wobbly' at maximum. Note that the speed of wow & flutter follows the tape speed.

Tip when using Flanger mode: For smoothest results, turn Wow & Flutter down to minimum.

Bias

Arguably the most important control in this part of the service panel, *bias* is crucial for attaining a clean 'recording'. **Bias adjustments are normally made to flatten the tape's response curve**. Because any 'optimum' bias setting is necessarily a compromise, you're free to use *bias* creatively: lower values tend to improve the high frequency response at the cost of more distortion wherever magnetization is low (i.e. around where the waveform crosses zero). Higher values have roughly the opposite effect i.e. you get lower distortion but less highs.

Setting bias to 0.00 by double-clicking on the control will give you what we determined to be the best compromise – a fairly flat response without too much distortion. Note that some engineers like to run their machines moderately over-biased, which delivers slightly lower distortion and a cleaner low-end at the cost of a more dampened treble response. See frequency response plots showing the effects of different bias settings.

Repro Head Parameters

The central block in the service panel lets you adjust physical attributes of the repro head...



Gap Width

Of course real tape machines don't have a *gap width* parameter – you would need to find the right screwdriver and physically exchange the repro head to do that. Gap width determines both the upper and lower frequency thresholds, it affects the amount of high frequency 'gap loss' as well as low frequency resonance (see *Bump* below).

At first glance, *Gap Width* appears to act like a simple tilt filter, but in fact it introduces various complex resonances and fluctuations across the entire audio spectrum. In conjunction with the *Bias* control, *Gap Width* can be used to balance the frequency response, as these two controls have roughly opposite effects on the signal. For instance, if you have set the bias fairly high, try setting a smaller gap (note that this will also shift the lower frequency threshold upwards a bit). Tip: If you want to imitate the frequency response of classic studio tape machines, set the gap width to somewhere between 2 and 3 µm (micrometers). See the frequency response plots.

Bump

Low frequency response is chiefly determined by the physical design of the repro head. However, just like the corrective elements found in some loudspeaker units, low frequency resonance effects in real tape machines can be dampened.

Satin's *Bump* parameter (usually called "head bump") controls the amount of low frequency resonance allowed: lower values mean more correction and a fairly shallow roll-off below the bump. Conversely, higher values mean less correction, and therefore more fluctuations and resonance build-up. See the frequency response plots.

Azimuth

Azimuth error (measured in 'arc-minutes') is emulated when the knob is dialed off-center – the tape head is skewed slightly away from the vertical. Although usually unwanted on real tape machines, this can sound interesting, especially when using the delay mode or when spatial repositioning of sounds is desired.

Ideally, a magnetic recorder has its record and repro head perfectly aligned, the angle between the head gaps and the tape is exactly 90°. If either head is just a bit off, the magnetic pattern of the recording on tape won't be reproduced correctly upon playback. A mismatch in azimuth results in a 'washy' sound, with poorer treble response and with stereo signals tilted to one side.


In Satin, the repro-head's azimuth can be adjusted per stereo channel (i.e. not across the many tracks possible while using multiple instances). What happens is that the pattern transported along the head is no longer time-aligned. Since all tape heads are stereo here, mono components of the signal hits one of the gaps later, and this short delay seems to shift the stereo image to one side or the other. Audio engineers call this the 'Haas effect': our hearing system determines the spatial location of an audio source by the difference in time/phase the wavefront reaches our ears. When summed to mono, this delay also creates a comb-filter effect, colouring the sound quite drastically.

Another factor related to azimuth error is the head gap itself. Originally perpendicular to the tape, increased skewing leads to a wider effective head gap. The wider gap can't pick up short wavelengths as well as narrower gaps, leading to even more treble loss. The wider the track width, the worse this becomes. Note: Satin simulates a 1" two-track head arrangement here.

Azimuth error also depends on the tape speed: the slower the transport, the more apparent the effect. Machines running at 30 ips are less prone to azimuth error as the resulting delay will be much shorter than at, say, 7.5 ips. Also, the gap-widening effect is less significant at higher speeds. Although azimuth affects all repro heads, in *Delay* mode (only) the angular change alternates left/ right, which means that if you set azimuth to a positive value e.g. '+2', then heads 1 & 3 will turn to the right while heads 2 & 4 will turn to the left. As *Delay* mode uses multiple repro heads / taps, adjusting the *Azimuth* value can deliver some rather interesting spatial smear effects!

Analyzer

Typically, when a tape recorder needs to be realigned, calibration tones are sent to the machine and the results are monitored with a voltage meter or a built-in metering system. This is a tortuous, time-consuming job, but since we're talking software, things are a lot easier in Satin...

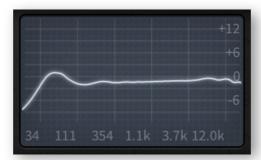


The analyzer continuously measures frequency response. As we weren't keen on having test-tones sent to the audio-outputs, we gave the analyzer its very own copy of the entire DSP part!

Plot mode

Right-click in the analyzer window to select one of three plotting modes. The default is *glow*, which shows inertia just like a real analogue oscilloscope. The *fast* option is a low-CPU variant with no blurring. The *eco* option is even lighter on the CPU, but updates at a much slower rate.

Circuit Parameters

Finally, the service panel lets you virtually 'replace' parts of the tape machine's circuitry:

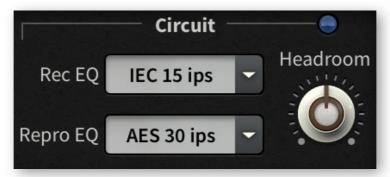

Circuit: EQ options and headroom

Rec EQ / Repro EQ

The choice of EQ is crucial for achieving clean, undistorted tape recordings. However, results still depend on a variety of parameters and internal factors – there is no such thing as 'the perfect EQ curve'. Satin offers a variety of industry-standard EQ curves. Of course you can choose a particular curve to mimic a specific machine, but you could also get more experimental...

The rec/repro EQ curves were originally meant to be used in matched pairs – the same standard is chosen for both the recording and reproduction process (the repro curve compensates for the recording curve by applying the inverse function). For Satin, we thought that allowing them to be selecting separately would not only be fun, but it would also let you correct strong frequency errors. For matched pairs, set the Repro option to *Same as Rec*.

Having separate EQ curve selection also means you can use Satin as a format converter: if you have transferred a real tape recording to your DAW from a machine with an unsuitable EQ, you can select your machine's EQ from the list as Rec EQ, then set the target curve as Repro EQ.

Note: While using Satin to convert formats, you should activate bypass tape.

Flat	Disables equalization in this part of the circuit. Although we can't think of any professional unit that doesn't have a corrective circuit, the <i>Flat</i> option is there for whenever you need as much high-frequency saturation as possible (for instance when taming transients). Please be aware that using no EQ during recording quickly leads to treble distortion, hence some serious slew-rate limiting.
	quickly leads to treble distortion, hence some serious siew-rate limiting.

Note: The IEC curves (formerly known as CCIR) for magnetic recording exist in two flavours, and these are usually the best choice for tapes running at fairly slow speeds.

IEC 7.5 ips	IEC 7.5 ips cuts off frequencies above 2275Hz (-3dB point), which is rather low. Of course the primary focus in the past was to reduce distortion as much as possible – lower speeds generally mean more distortion. Using IEC 7.5 ips came at the price of reduced signal-to-noise ratio i.e. more tape hiss, but you can turn that down in Satin anyway. Although IEC 7.5 ips is the most drastic option, it has the advantage of retaining transients well. It also has the least HF loss and therefore the least amount of slew-rate limiting.
IEC 15 ips	The main difference between this option and 7.5 ips curve is that the corner frequency is set to 4550Hz – exactly twice the frequency of IEC 7.5. This is no coincidence, in fact most of the underlying issues and factors are frequency-linear. Since IEC 15 outweighed distortion and noise floor quite successfully, it became the de-facto standard for mastering-grade tape recorders.
NAB	A long-running contender to IEC 15 ips, the NAB standard has (theoretically) a higher noise floor while preserving more HF energy. Its regular corner frequency is 3150Hz, but what's up with the bass? There's a huge 3dB boost at 50Hz, which grows stronger at lower frequencies, finally reaching a massive +8dB at 20Hz. This behaviour was designed to compensate for the typical LF losses inherent in standard equipment of those days. The NAB repro EQ curve corrects the bass boost admirably (which the other standards don't really), but the tendency towards LF distortion remains. Despite all the drawbacks, NAB can create a low frequency 'oomph' that is just plain sexy!
AES 30 ips	In this standard, the treble is cut at 9100Hz during recording. This frequency happens to be very suitable for mastering applications, provided a high-output / low-saturation tape and the correct tape speed (30 ips) are used. Possible drawbacks: AES 30 ips can be more sensitive to very high input levels, and there is some risk of transient-smearing.
Same as Rec (repro EQ only)	Sets the playback (repro) EQ to the same option as the recording EQ.

Note: In accordance with the standards, all EQ curves attenuate at the relatively shallow slope of 6dB per octave, so none of them should cause significant phase problems.

Headroom

By default, the headroom of the record and repro circuit is set to 9dB above the 0dB tape level, leaving some room before you start to hear the circuit distorting. The amount of this distortion is indicated by the brightness of the blue 'LED' above the 'Headroom' label.

For maximum tape saturation and circuit transparency, we recommend setting high *Headroom* values. If you're aiming for a gritty, brickwall-type distortion, you could try a low value – but please be aware that you would lose much of the tape 'liveliness'.

Configuration



Clicking on the cogwheel icon at the top right opens the global configuration pages where you can adjust the appearance of Satin's window (size and brightness) as well as assign MIDI **continuous controllers** to any Satin parameter.

The 4 buttons are MIDI Learn [L], MIDI Table [≡], Preferences [tools] and Close [X]:

Tip: Right-click within the button area to set the currently selected page as default.

MIDI Remote Control



MIDI Learn

This page lets you assign MIDI CC ('control change') to individual parameters. The CC data can be generated by hardware knobs / sliders, or from MIDI tracks in the host application. For how to route MIDI into effect plug-ins, please refer to the documentation of your host application.



The translucent overlay displays all MIDI-learnable elements as selectable outlines. Some of Satin's controls won't be immediately available in the MIDI Learn page – you will have to choose between Studio, Delay or Flange mode first.

Try it: Click on the Input knob and send Satin some MIDI CC data – move a knob or slider on your MIDI controller and the connection is complete. Switch to the MIDI Table page to check that the new connection has appeared in the list...



MIDI Table

Selecting the '≡' MIDI icon button opens an editable list of all MIDI CC assignments:



Parameter

The first field selects one of Satin's parameters, which are sorted into sub-menus. Try it: Click on the 'ADD' button at the bottom left of the MIDI table window and experiment with the Parameter field. Then remove the assignment by clicking on the small [x] to the right of the line.

Channel / Controller

The next two fields specify the MIDI channel and CC number.

Mode

Specifies the range and/or resolution of values.

Normal.....Full range, continuous

Integerfull range, whole numbers only

Fine......0.01 steps between the two integers closest to the current value

Type

Specifies the type of hardware. By far the most common is Continuous 7-bit.

Encoder 12.....'relative mode' endless knobs that repeatedly send the CC value 1 when

turned in the positive direction, or 127 (interpreted as -1) when turned in the

negative direction

Encoder 64.....'relative mode' endless knobs that repeatedly send the CC value 65 when

turned in the positive direction, or 63 when turned in the negative direction

Continuous 7-bit7-bit MIDI CC (standard resolution)

Continuous 14-bit.....14-bit MIDI CC (high resolution, rare)

Remove

To remove individual MIDI CC assignments, click on the small [x] to the right of the line. To remove all assignments at once, click on the **Delete All** button at the bottom of the window.

Preferences Page



Click on the 'tools' icon to open the Preferences page, where you can set several global defaults to suit your computer mouse and monitor:

Controls

Mouse Wheel Raster

If your mouse wheel is rastered (you can feel it clicking slightly as you roll the wheel), set YES so that each little click increments / decrements in sensible value steps.

Appearance

Analyzer

The appearance of the response display in the service panel: *eco* is particularly CPU-friendly.

Default Size


Sets the default GUI size for each new instance. You can temporarily change the GUI size without entering the *Preferences* page – simply right-click in the background.

Gamma

Adjusts the GUI brightness (darker, dark, neutral, bright or brighter).

Text Antialiasing

Switches the smoothing of labels and values on or off. Normally left on.

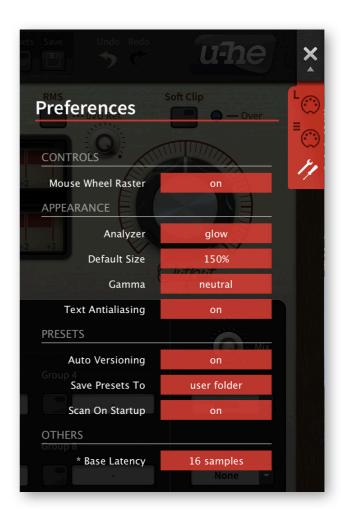

Presets

Auto-Versioning

If 'on', an index is automatically appended to the preset name and incremented each time it is saved. Saving 'Space' three times in a row would give you three files: 'Space', 'Space 2' and 'Space 3'.

Save Presets To

Choose the user folder option if you want all saved presets to land in the User folder instead of the currently selected one.

Scan On Startup

This determines whether the preset library should be scanned and the database recreated when the first instance of Satin is started, e.g. when you reopen a project.

Others

Base Latency


If you are certain that your audio system – hardware as well as software – uses buffers that are a multiple of 16 samples in size (please refer to the respective documentation), you can safely disable Satin's base latency. Otherwise leave it set to the default '16 samples', which will prevent audio drop-outs. Note that switching *Base Latency* will only take effect when the host allows e.g. on playback or after switching the sample rate. Reloading Satin will always work.

MORE ABOUT BUFFERS

Internally, Satin processes audio in chunks of n x 16 samples. The 'block processing' method significantly reduces the CPU load and memory usage of all our plug-ins.

For example. if the number of samples to be processed is 41, Satin will process the first 32 and keep the remaining 9 in a small buffer (16 samples is big enough). Those 9 samples are then processed at the start of the next call... and so on.

The extra buffer is only necessary if the host application or audio driver processes 'unusual' audio buffer sizes. Many hosts process buffers of 64, 128, 256 or 512 samples (all multiples of 16), in which case you can try switching it off so that Satin can work latency-free.

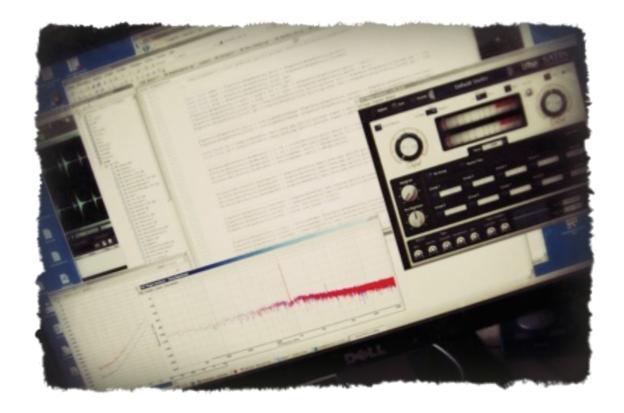

The Sample Rate Issue

It has recently come to our attention that certain parts of Satin can react differently depending on the sample rate. Version 1.3.3 addresses this issue with the following:

Analyser

The built-in analyser in previous versions used the same test signal and signal length regardless of sample rate. As Satin is very non-linear and the high frequency content of the test signal increases proportionally to the sample rate, the visualisation would vary drastically between different sample rates. We have minimized such differences by oversampling the test signal and resizing it in proportion to the sample rate. Differences are still measurable, for example, between 44.1kHz and 48kHz, but this is simply because a signal at 48kHz can have more energy beyond 20kHz.

When using noise reduction circuitry (which compresses and expands the signal), the visible difference between sample rates is more obvious, and we were unable to improve this aspect.

Note that dynamic effects such as compression and expansion will sound different depending on the sample rate, because the algorithm sees different high frequency content in the sidechain signals – even if that high frequency content is inaudible to the human ear.

Pre-emphasis and built-in EQ

With sample rates above 88.2kHz Satin's pre-emphasis circuit had a quirk which caused anything above 20kHz to be boosted considerably. Our high shelving filter model has unlimited bandwidth (it is 'too ideal') while its analogue counterpart hasn't. This didn't occur to us while we were designing our model at 44.1kHz...

The same applies to all the EQ models (Rec/Repro). There was no audible difference between sample rates except when the audio material contained a lot of high frequencies (especially when these frequencies were not present at the lower sample rates).

The solution: In 1.3.3 we replaced all EQ models as well as the Pre-Emphasis shelving filter with versions matching the frequency response at 44.1kHz, and only a minimal effect above 20kHz. This further improves the visual similarity of the Analyser at different sample rates.

Legacy Mode

While the above improvements represent a good remedy for Satin's future, we decided to offer a Legacy Mode that causes Satin to perform almost exactly as it always did in the past.

Although Legacy Mode is automatically enabled when loading existing projects (to ensure that they sound the same if created at 88.2kHz or higher sample rates), you can select either *Legacy Mode* or *1.3.3 Mode (Native)* via right-click on Satin's data display.

Tips and Tricks

Here are a few tips that we and our beta testers noted during development, as well as some old tricks rediscovered by testing 'typical use' cases...

Central control from a single instance

Even if all the Studio mode instances of Satin in your project are independent i.e. no grouping was required, you might like to assign each one to its own group anyway, and name them accordingly. Having done that, you can add a 'dummy' instance (inserted into its own 'dummy' track) to control all the others, which can then remain hidden. Tip: To save CPU, lock and activate 'Bypass'.

Taming transients

In the golden age of tape, recording engineers were well aware of how their machines and reels would compress and colourize the recordings. To add some colour to the 'digital perfection' of today, there is a tendency to slap a lot of compression, EQ and other effects onto all the tracks – much of which may be unnecessary when printing to tape (virtual or otherwise).

Extracting the record and repro EQ from the overall chain, we can directly operate on the main places where the balance between distortion and minimum noise is achieved. And since there are no noise issues to worry about in Satin, we are free to choose the curve that best suits our needs. To find the 'right' one, we need to check the spectral content of the incoming audio. If we want to preserve as much transient information as possible, we need to apply pre-filtering that rolls off the HF as low as possible, then do the opposite during playback.

The more high frequencies we have while recording directly to tape i.e. without using filters, the more tape saturation there will be. This is precisely the case when both EQs (record & repro) are set to 'flat'. For transients, this means *maximum slam*. We can exaggerate it even more by adding some HF pre-emphasis. We could also misuse the head-gap control as a tilt filter to compensate for the added brightness (although we'd be messing with the entire response curve).

Always check the peak meters – you should notice a small gain reduction on the transients. What remains is the problem of *ear fatigue*: our hearing adapts very quickly to the 'coziness' of milder transients, and if you overdo this trick, you will end up with a massive HF smear.

For plots showing high-frequency saturation, go here.

Multitrack coherence (the 'glue' effect)

The more tracks you process with a real multitrack tape machine or multiple instances of Satin, the more 'tape' sound you will notice. This cumulative effect is often described as 'glue'.

An important factor was already discussed above – the transients taming / smear effect. When applied several times in parallel, the results become softer more easily i.e. you don't have to aim very high on each individual track. The process is often barely noticeable when you solo a track, the magic starts when they all add up. Here's one recipe that can improve coherence – do the following on multiple channels, with the grouping feature enabled:

- Choose a suitable tape speed. Remember that faster tape speeds generally mean more treble, but also some loss of 'weight' in the bass.
- Choose a tape type according to how much distortion and 'roundness' you would tolerate.
- Set both the *Rec EQ* and *Repro EQ* to a type that still retains plenty of transient information, but also offers some slight taming of the occasional overload.
- Apply a minimal amount of tape hiss. A decent studio recorder has about -70 to -60 dB.

- Add some asperity / modulation noise to make things a bit more random & rough, especially in the stereo field. Be careful with this, as bass frequencies can reveal a prominent 'noise tail' very quickly. This probably isn't wanted on every channel, or at the same amount. If in doubt, leave the asperity control out of the group by locking it.
- Add a minuscule amount of wow & flutter. Set it so that you don't notice any warbling from pure sustained notes or 'difficult' instruments such as pianos.
- Adjust the output gain so that the music appears to have the same volume when you bypass
 the plug-in. Make sure you don't drive each instance too hard as distortion is introduced very
 gradually in Satin, there will already be plenty of saturation and extra harmonics when you
 approach the 0dB mark.
- Keep comparing your results by switching to bypass. Listen to the transients, spectral balance, fullness / richness, stereo width and any other differences. Try to spot compression effects or even differences in the front-to-back localization.
- Review and qualify your impressions: Is the 'tape processed' sound really better? Have you overdone it, have you worsened the signal integrity? Do you still have enough transients, is it still crisp enough? If in doubt, simply back off a bit and compare again!

Tape reverb!

Satin's 4-tap tape delay is capable of some interesting reverb-like effects. Try this:

- The delay times should not be integer multiples of one another. They should be either prime numbers or unrelated fractions. To do the math, although the delay range is only 0 to 8 inches, it is best to multiply this by a constant first. For instance, if we multiplied by 10, we would have a range of 0 to 80. Prime numbers within that range are e.g. 5, 17, 37, 43, 53, 73. Those values can then be divided back into the 0 to 8 range: 0.5, 1.7, 3.7, 4.3, 5.3 and 7.3 (inches).
- Fix sensible levels e.g. tap1 = 1.0, tap2 = 0.5, tap3 = 0.25 and tap4 = 0.125: an exponential decay in our particular delay arrangement.
- Now set the balance knobs to arbitrary positions (it doesn't really matter much at this point). From the 'Routing' menu, we will choose 'Cross' for maximum stereo width.
- Now for some modulation. For the most 'dispersive' effect, use faster modulation on the shorter delays and slow modulation on the longer ones. Experiment!
- The feedback levels should be somewhere between 0% and 50% for our chosen tap levels, otherwise the delays are likely to ramp up instead of down.
- In the feedback path, higher frequencies should be damped by lowering the 'High Cut' to a
 natural-sounding value. Typically, the larger the simulated space, the less HF would remain. If
 needed, the bass can be cut a bit, thus making the sound being less troublesome within a
 complex arrangement.
- Bingo! You should have a nice 'tape reverb' already save it?

Format conversion

Decoding old tapes: Imagine the following scenario: You find a stack of old reels in the attic. The tracks were recorded with NR switched on, but that particular machine is no longer available to decode the tapes. You know somebody who owns an otherwise compatible machine, but with a different compander system (or no NR at all). Here's how you can decode those tapes anyway:

- Make sure the tape machine's NR section is switched off.
- · Record the tape directly to your computer.
- Insert an instance of Satin for each track.
- Select *Studio* mode, assign all tracks to the same group and activate the *Bypass Tape* button(thus disengaging Satin's tape processing, which we won't be needing).
- · In Satin's compander, set the encoder circuit to 'none'.
- Set the decoder to the type you believe was used to encode the tape if you're lucky, this will be handwritten on the tape box!
- Experiment with Satin's input level, as this can affect the decoding process. The incoming signal should not drive the VU meters into the red.

Correcting equalization: Real tape machines are calibrated to suit certain EQ standards. When a tape is played back on a machine that is calibrated very differently from the machine used for the original recording, it is likely to sound much too bright or too dull etc.. Your job is to correct the 'error' caused by using two different equalization systems:

Let's say the original machine was set to IEC/CCIR at 15ips (again: inspect the tape box for handwritten details) and the machine you are using for playback has NAB calibration. We need to apply the inverse curve of that frequency error...

- Set Satin to Studio mode and activate the Bypass Tape button.
- In the Service panel, switch the record EQ to NAB.
- · Set the repro EQ to IEC15ips.

Tapes processed in this way (first IEC then NAB) have a bass loss and treble gain. Encoding NAB first then decoding IEC has the opposite effect – a stronger low end and a weaker treble response. See frequency response plots in the next chapter.

Enhancing vocal tracks

If you push a large professional multitrack recorder hard enough, you probably won't need noise reduction as such – at least not for the less up-front tracks like backing vocals. However, it is precisely these tracks that come alive so beautifully when processed by NR encoders...

Most noise reduction systems use some sort of frequency-dependent dynamics processing, either in the main signal path, in the detection side-chain, or in both. Some engineers misused encoders for the so-called *Dolby® Trick*, with the brand name standing for a broader range of systems.

- In Satin's compander, set the encoder to 'A-Type Mod', but leave the decoder off. Also try bypassing the tape and experimenting with the Mix parameter. Owners of the original hardware units generally used them in an AUX bus with Satin, you can simply adjust the 'mix' control for the amount of enhancement you want.
- Listen to how the quieter parts become more airy, while the frequency response remains flat during the louder passages...


Back in the days of portable cassette players, many wired-for-sound joggers preferred listening to their encoded tapes with the NR decoding switched off: The higher noise floor didn't matter too much – it was worth it for that extra treble!

Frequency Response Plots


This chapter contains about 30 frequency response curves – for general reference purposes as well as for what to expect while using Satin's built-in analyzer. You will find several links to these plots within the main body of this manual.

- Bias & Total Harmonic Distortion shows frequency response balance vs THD. THD was measured with a sine wave at 1kHz, which is automatically subtracted from the plots (the 3kHz peak is the 3rd harmonic of the test tone).
- Bandwidth & Head Bump shows how the head bump / contour effect and HF response vary according to head gap and tape speed.
- **Crosstalk** the right channel (red) is set to 0dB, the left channel (blue) is set to minus infinity so that only crosstalk from the right channel appears.
- **High-frequency rolloff without pre-emphasis** shows the natural HF damping without applying treble boost at the input.
- **High-frequency saturation** illustrates treble smear when the input levels are high, with and without proper record/repro EQ. The test signal was a logarithmic sweep. Note that there are no amplitude errors, but some ripple.


BIAS & TOTAL HARMONIC DISTORTION

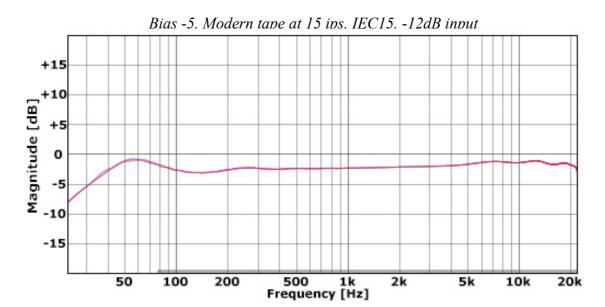



Bias -5, Vintage tape at 15 ips, IEC15, -12dB input

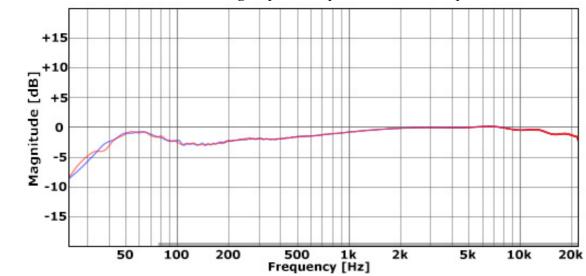



THD with bias -5, Modern tape at 15 ips, IEC15, -12dB input

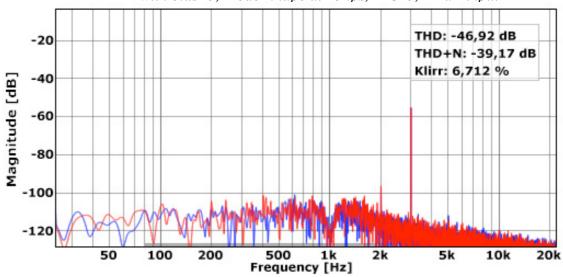


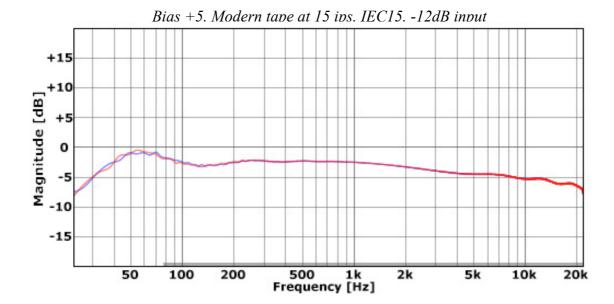


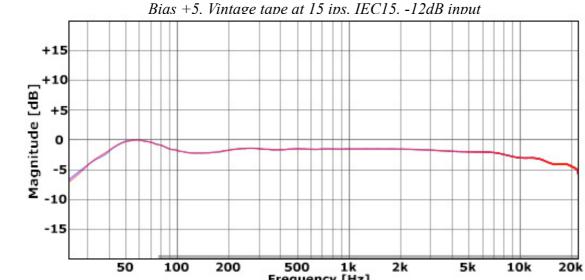


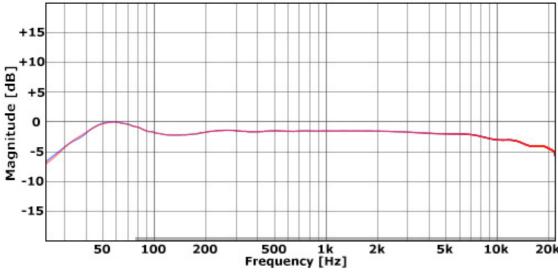

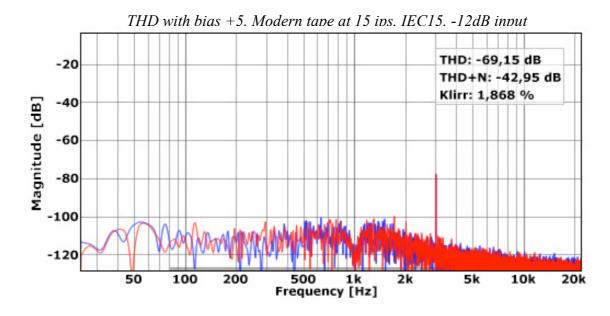

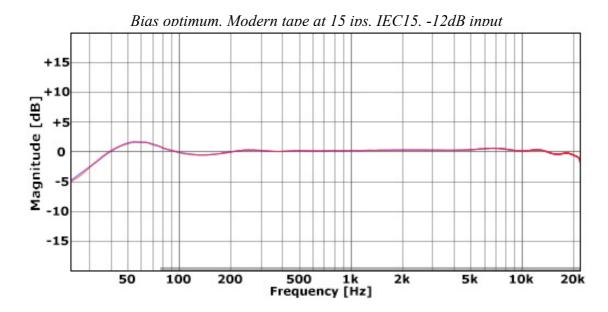


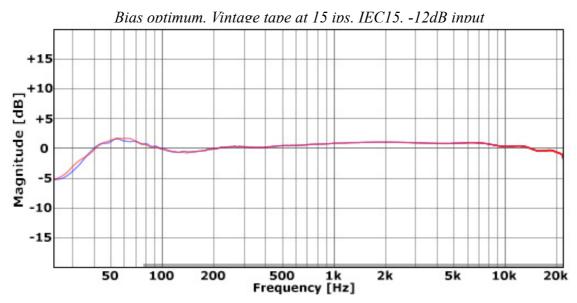

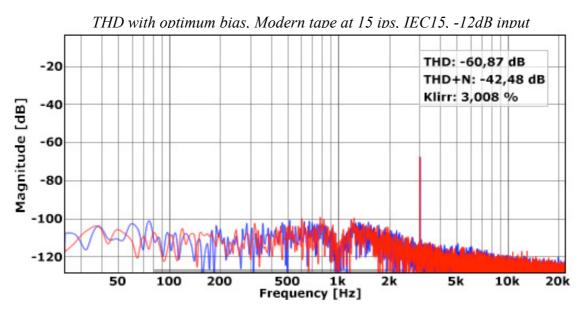


BANDWIDTH & HEAD BUMP


Gap 2µm, Modern tape at 7.5 ips, IEC15, input -12dB

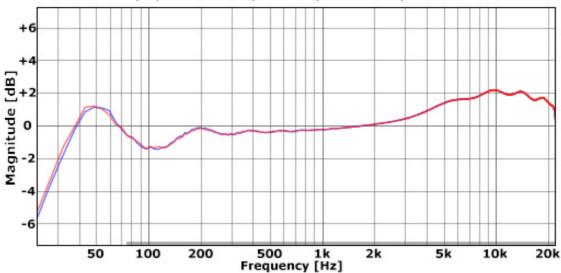


Gap 3µm, Modern tape at 7.5 ips, IEC15, input -12dB

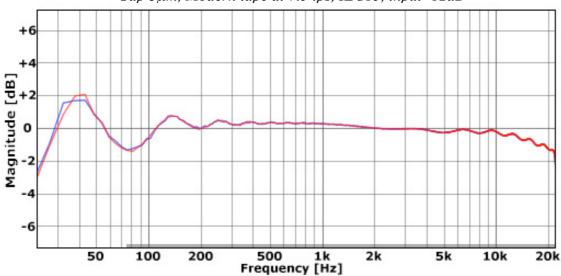


Gap 4µm, Modern tape at 7.5 ips, IEC15, input -12dB

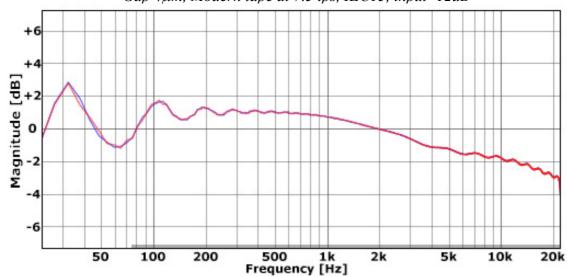


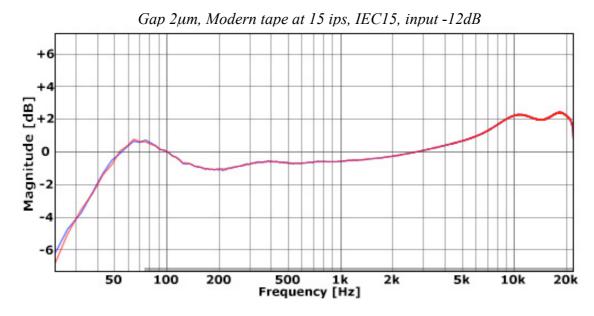


Gap 3µm, Modern tape at 15 ips, IEC15, input -12dB

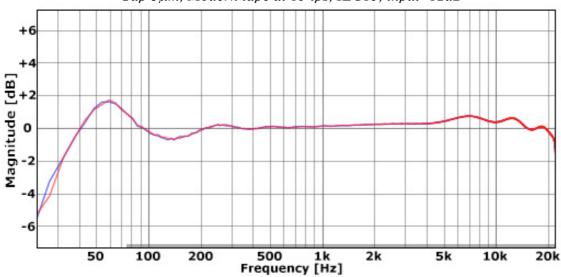


Gap 4µm, Modern tape at 15 ips, IEC15, input -12dB

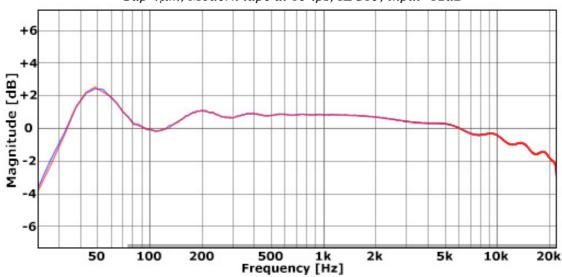


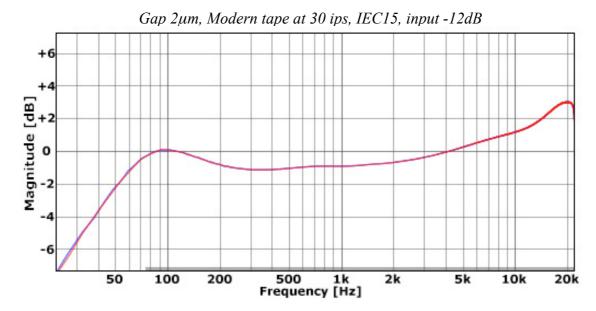


Gap 3µm, Modern tape at 30 ips, IEC15, input -12dB

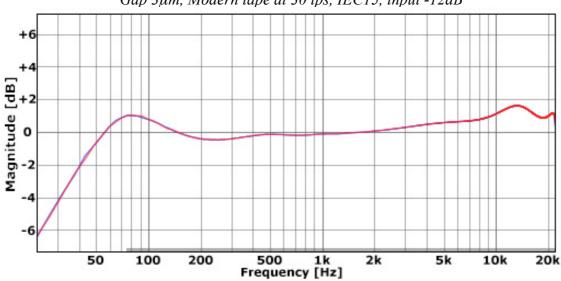


Gap 4µm, Modern tape at 30 ips, IEC15, input -12dB

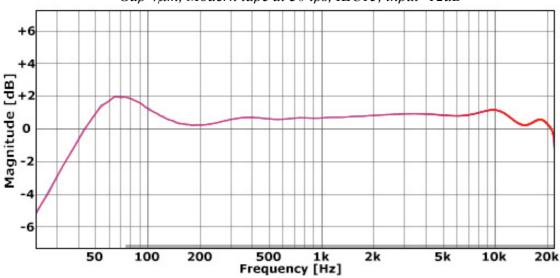

CROSSTALK

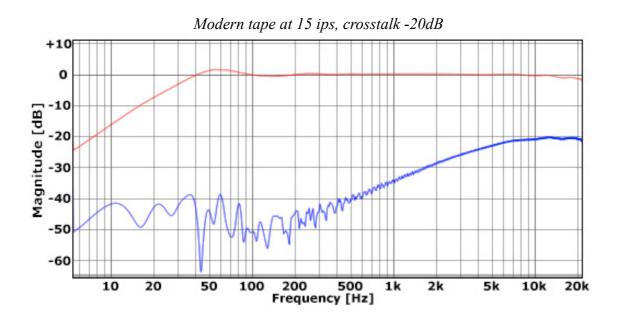


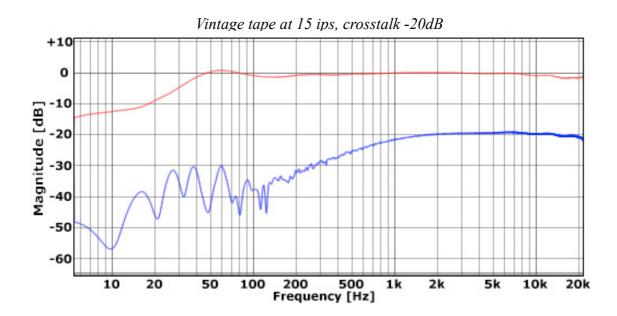


RED = right channel at 0dB


BLUE = crosstalk only (by setting the left channel to -infinity)


ROLLOFF WITHOUT PRE-EMPHASIS

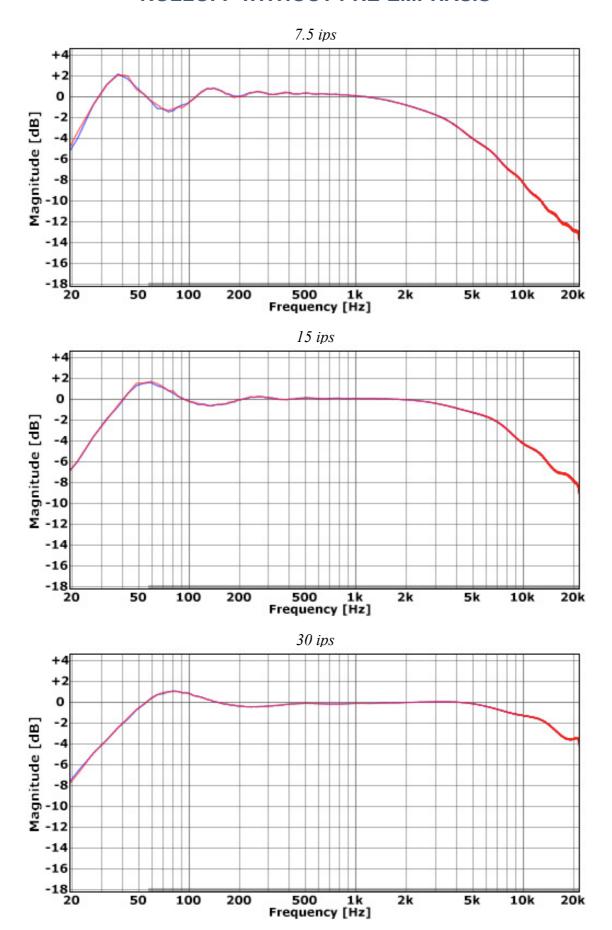



HIGH FREQUENCY SATURATION

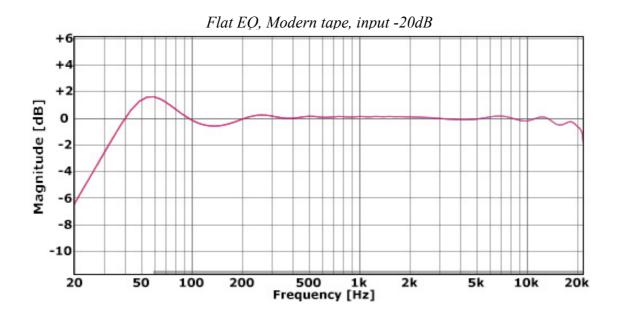


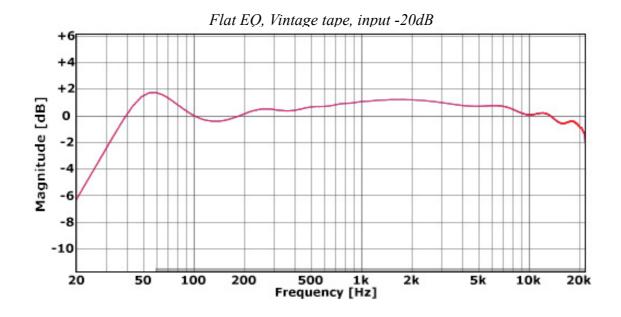


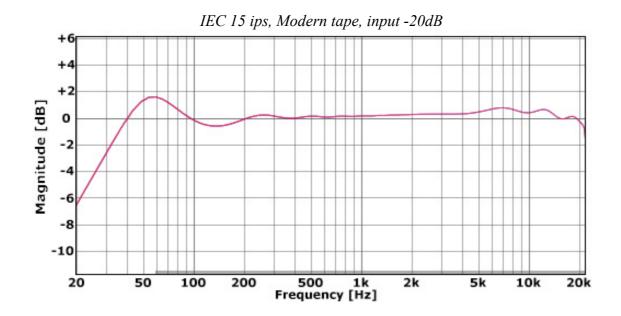


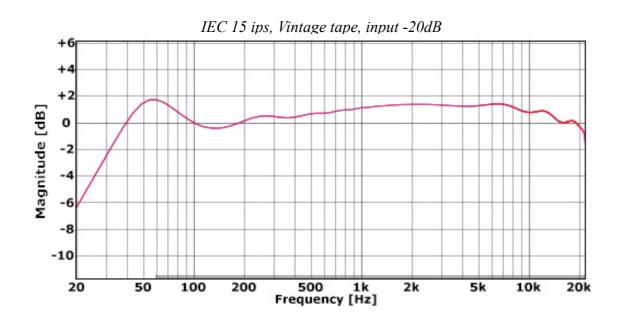

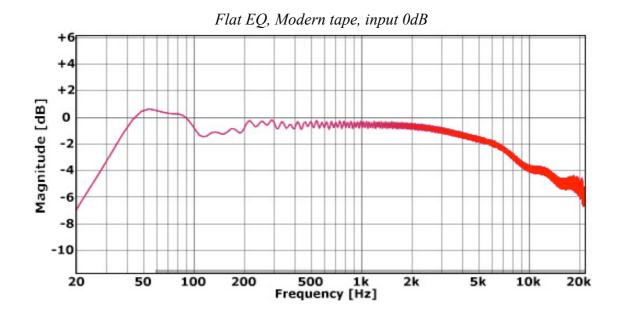

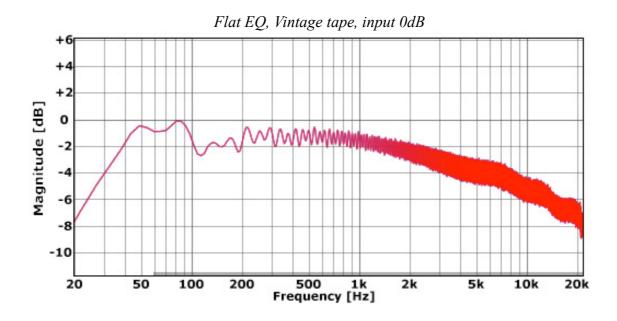

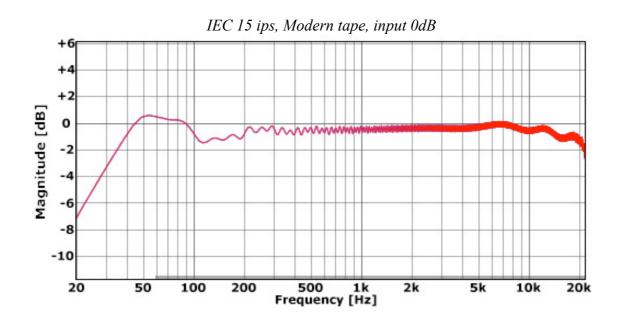

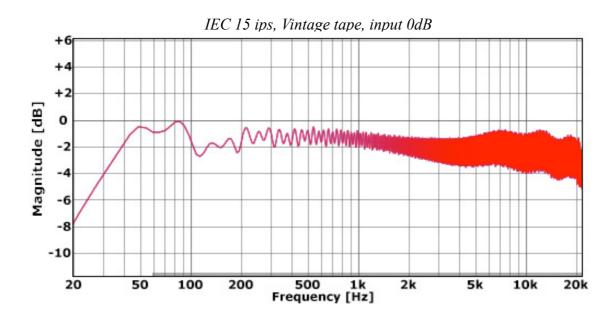

Note: The 0dB plots were created using sine wave sweeps, the -20dB ones used a Dirac impulse.

NKS

Satin supports Native Instruments "NKS extensions" format so that it can be integrated into the Komplete Kontrol software or Maschine environments. Satin's factory presets are optionally installed as tagged .nksfx files. A few pages of performance controls mapped to common parameters are automatically generated and saved together with each .nksf preset.

Saving as .nksfx is only possible in the VST2 version

Mac owners can use – temporarily if necessary – any host application that supports VST2

Saving in NKS format

While the *native*, *h2p* and *h2p extended* options cause Satin to save presets into the currently selected preset directory, *nksfx* files go directly into the preset location used for Komplete Kontrol or Maschine (so .nksfx files do not appear in Satin's preset browser). To make them visible in Komplete Kontrol, open its preferences and rescan the preset locations.

Batch conversion

First, right-click the [save] button and set the target format to *nksfx*. Via cmd-click (Mac) or alt-click (Win), select all presets in the current folder you want to convert, then right-click any of the selected presets and choose convert to nksf. Note: The original files are not affected.

What to do if Satin doesn't show up in Komplete Kontrol / Maschine.

First of all, make sure your NKS software is up to date: Komplete Kontrol V1.5+ or Maschine V2.4 are the minimum requirements for u-he.

In Windows, Komplete Kontrol must know the Vstplugins folder containing Satin: Open Komplete Kontrol preferences, go to *Locations* and add your *Vstplugins* directory if necessary, hit *Rescan* and check whether Satin appears.

Maybe the NKS preset folder is empty? If so, please reinstall Satin with the correct VST path and the NKS-option checked. Here are the preset folder locations:

Mac MacHD/Library/Application Support/u-he/Satin/NKS/Satin/

Win C:\Users\YOU\Documents\u-he\Satin.data\NKS\Satin\

Perhaps the XML-File is missing from this location:

Mac MacHD/Library/Application Support/Native Instruments/Service Center/u-he-Satin.xml

Win C:\Program Files\Common Files\Native Instruments\Service Center\u-he-Satin.xml

A re-install with the NKS-option checked should also remedy this issue.

What to do if Komplete Kontrol / Maschine is unable to load Satin

Either Satin wasn't installed as VST2, or it wasn't installed with the correct path. The default VST path is fixed in MacOSX, but in Windows it can be freely assigned during installation:

Mac: Macintosh HD/Library/Audio/Plug-Ins/VST/u-he/

Win: <User VST Folder> / (path for the VST plug-in set during installation)

If Satin's VST plug-in cannot be found in one of these locations, run the installer again making sure that you set the correct path and have activated 'VST' as installation option.

Glossary

A

ACE (u-he product) Any Cable Everywhere – a compact modular synthesizer

AC bias addition of HF alternating current to improve fidelity of tape recordings

AES Audio Engineering Society

aliasing ugly distortion caused by resolution limitations in digital systems

amplitude the level of a signal

asperity roughness or imperfection (of the tape surface)

attenuate to reduce the amplitude

a-weight(ed) measurement offset compensating for how the ear perceives loudness

azimuth see http://en.wikipedia.org/wiki/Azimuth

B

Bazille (u-he product) PD and FM based *modular* synthesizer **bias** a shift / offset by way of addition – see *AC Bias*, *DC Bias*

C

ColourCopy (u-he product) bucket-brigade delay plug-in compander compressor / expander pair compressor device that reduces an audio signal's *dynamic range* crosstalk interference between adjacent tracks / channels cutoff (of a filter) frequency threshold above and/or below which frequencies in the signal will start to be attenuated or boosted

D

dB (Decibel) a commonly quoted unit of gain / attenuation
dBFS (DeciBels, Full Scale) dB levels in systems with a defined maximum level
DC bias (to tape, obsolete) addition of direct current to the signal being recorded
Diva (u-he product) mix-and-match VA synth with zero delay feedback filters
default value assigned before user intervention, or a sensible starting point
dynamic range span / difference between the quietest and loudest parts of a signal

E

EQ equalization, manipulation of *frequency response* **electromagnetic** interrelation between electrical currents and magnetic fields **erase head** the tape machine head that removes previous recording / magnetization **expander** device that increases an audio signal's *dynamic range*

F

fidelity (audio) degree of similarity to the original signal
flange (effect) dramatically sweeping cancellation / enhancement of frequencies
flutter often irregular, rapid variation of signal properties (amplitude, phase,
frequency) caused by mechanical imperfections of tape machines. See wow
frequency rate of vibrations within an audio signal
frequency response amplitude fidelity across the entire frequency range

G

gain increase in volume
gap width size of the head gap
gap loss any reduction in fidelity occurring in a head gap
GUI graphic user interface

Н

harmonic distortion overtones, integer multiples of frequencies in the signal headroom available margin before exceeding the capabilities of a system head bump low-frequency resonance caused by physical attributes of the repro head head gap small space between the two magnetic poles of a tape head HF high frequency
hiss HF noise caused by random magnetic orientation of particles in the tape
Hive (u-he product) CPU-friendly VA / wavetable synthesizer
Hz (Hertz, cycles per second) the standard unit of frequency

IEC/CCIR a tape EQ standard – International Electrotechnical Commission / Comité Consultatif International Radiotélécommunique

IPS (inches per second) the standard unit of tape speed

JK

junk in Satin: A preset file made invisible in the browser, but not deleted

L

linear in a straight line

LF low frequency

LFO low frequency oscillator

lowpass filter electronic circuit that allows frequencies below a certain threshold to pass unhindered, while *attenuating* frequencies above that threshold

M

make-up increase of the output *gain* to compensate for processing lossesmodular consisting of discrete, interconnectable unitsmod / modulation governing the value of a parameter from a control signal

N

NAB (National Association of Broadcasters) a tape EQ standard NR noise reduction

O

oversampling process of sampling a signal at a frequency higher than twice the highest frequency in the signal, which reduces *aliasing* artifacts

PQ

parameter a measurable factor within a system, usually user-adjustable

pre-emphasis EQ applied before the record head to compensate for adverse effects generated by subsequent parts of the system

pre-magnetization see bias

Presswerk (u-he product) compression / dynamics plug-in

R

Repro (u-he product) bundle of 2 analogue synth emulations (mono and poly) **repro head** the reproduction (playback) head of a tape machine

resonance in Satin: strengthening of certain frequencies caused by oscillation within a system (e.g. *head bump*)

RMS (Root Mean Square) a standard statistical average of any varying quantity

S

saturation (tape effect) complex *compression*, distortion and colouration caused by inherent properties of tape machines – gives tape recordings a special 'warmth'

Т

tape head the parts of tape machines which transfer signals to and from the tape

The Dark Zebra (u-he product) cinematic soundset, bundled together with ZebraHZ

threshold a value above or below which an action commences

transients high amplitude, short-duration components within a signal

treble alternative term for high frequency range

Twangstrom (u-he product) spring reverb plug-in

U

Uhbik (u-he products) effects available either as plug-in bundle or as individual rack-extension (RE) units for Propellerhead Reason

V

VU meter standardized indicator used for monitoring audio levels

W

wow fairly regular, low frequency variation of tape speed caused by mechanical imperfections of tape machines. See *flutter*

XYZ

Zebra2 (u-he product) flagship 'wireless' modular synthesizer, combining many forms of synthesis in a single plug-in.

ZebraHZ (u-he product) special upgrade/update for Zebra2, made for running all presets included in *The Dark Zebra*